

# Preparation of Work


## Electrical (cont'd)

- When using the Service Tester, follow the manufacturer's instructions and those described in the Shop Manual.

Are range and porarity correct?




- Always insert the probe of the tester from the wire harness side (except waterproof connectors).

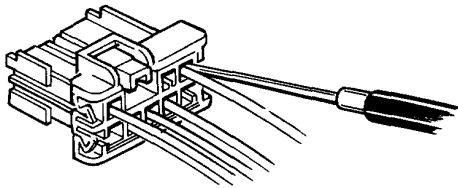


- Make sure to use the probe with a taper tip.

GOOD




NO GOOD



- Do not drop parts.

NO GOOD



# Symbol Marks

The following symbols stand for:



:Apply engine oil.



:Apply brake fluid.



:Apply grease.



:Apply DEXRON® II Automatic Transmission Fluid.



:Apply Power Steering Fluid.



:Apply or check vacuum.

①, ②, ③, .....  
①, ②, ③, ..... :Sequence for removal or installation.