


Sunroof

Glass and Sunshade Replacement

1. Open the glass fully.
2. To remove the glass, first remove:

- Rail holder cover
- Rail cover
- Sunshade rail holder
- Wind deflector
- Link stopper
- Lift-up guide


3. Lift the sunshade rail with guide rail and insert a spacer such as a wooden block in order to avoid interference between the sunshade rail and bolt when removing the sunshade.

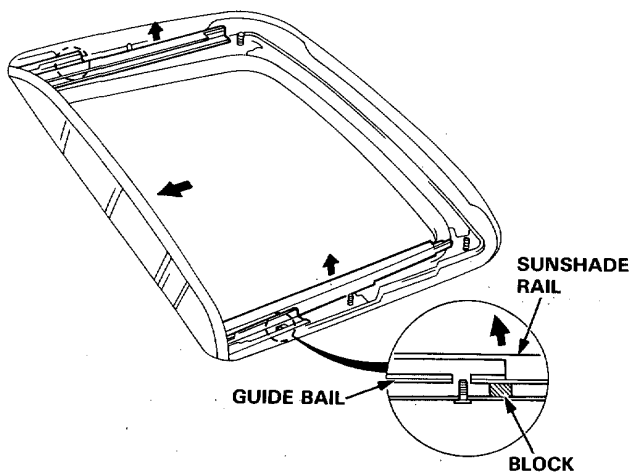


NOTE: The block must be taller than the bolt.

4. Slide the glass forward by sunroof wrench, then remove the front sliders from sunshade rails.


NOTE: Do not scratch the roof panel with the front sliders.

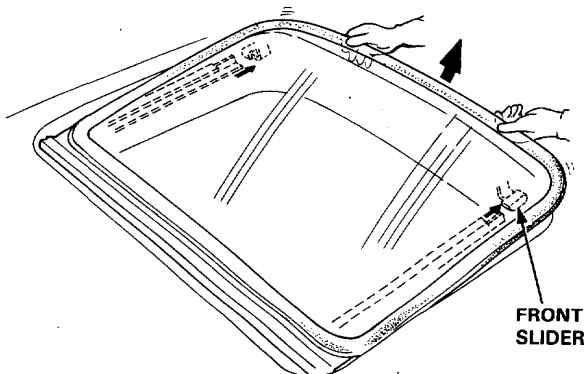

5. Remove the link slider from the inner cable slider by lifting the glass, then remove the glass.

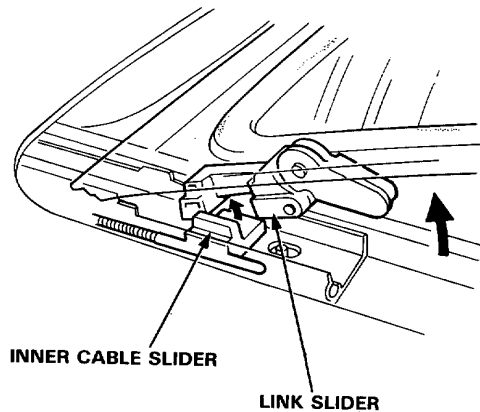

6. Slide the sunshade forward, then remove the sunshade.

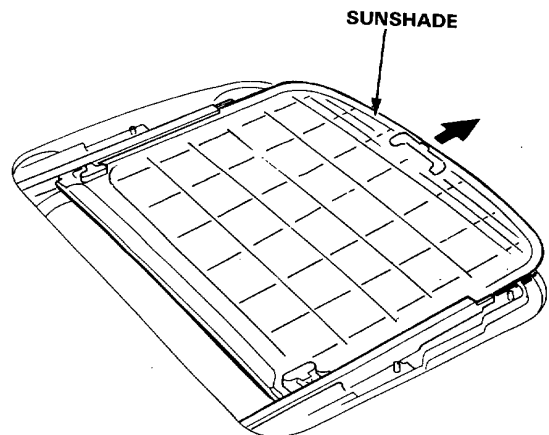

7. Install the glass and sunshade in the reverse order of removal

NOTE:

- Take care not pinch the drain seal in the sunshade rail.
- Check for water and air leaks.