


Carpet/Door Sill Moldings

Replacement

1. Remove:
 - Front seats and rear seat cushion.
 - Front seat belt lower anchor bolts (page 14-46).
 - Center console.
 - Right and left kick panels.
 - Door sill moldings.
 - Opener cover.
 - Footrest.
2. Pry out the clips at the rear edge and under the dashboard, peel off the tape.
3. Cut the ④ area first, then pull back the carpet as shown.
4. Remove the carpet by sliding it rearward.

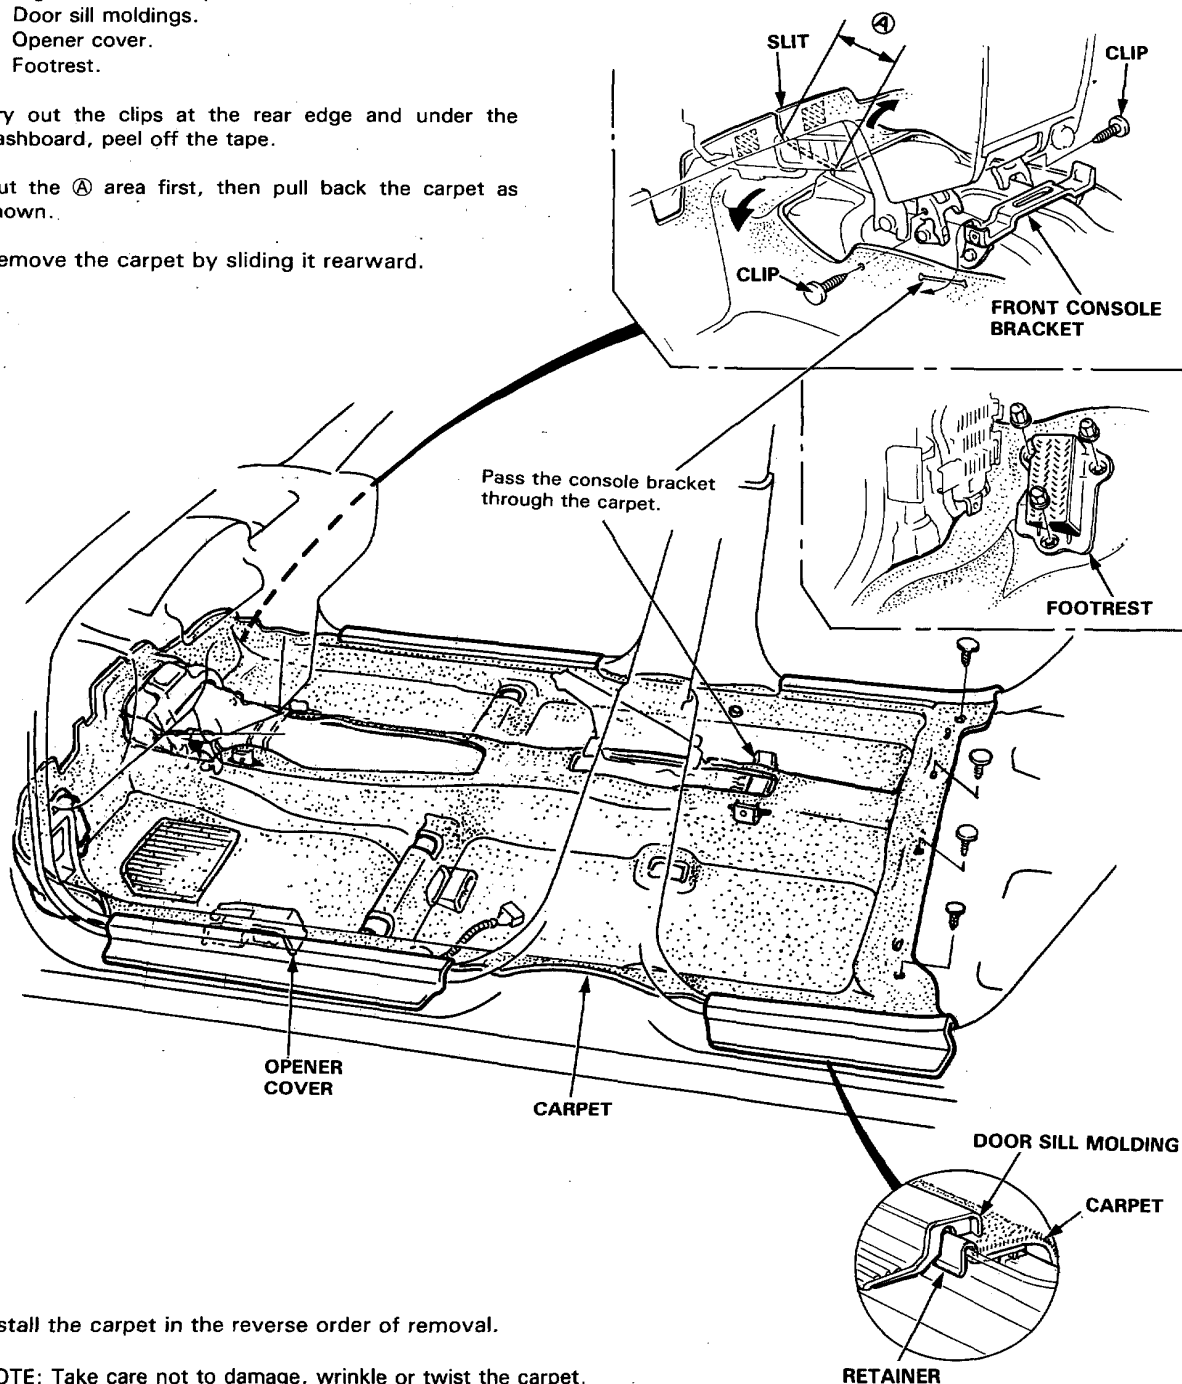

5. Install the carpet in the reverse order of removal.

NOTE: Take care not to damage, wrinkle or twist the carpet.