


Rear Fog Light, Day Time Running Light




Rear Fog Light Switch Testing

Check for continuity according to the table below.

	B	D		E
OFF				
ON				

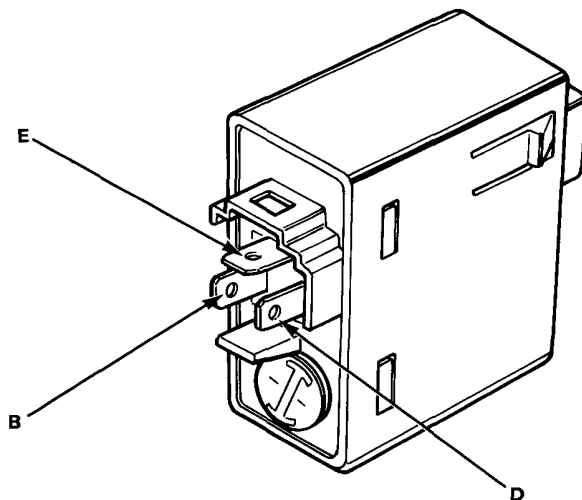


Day Time Running Light Wiring Diagram

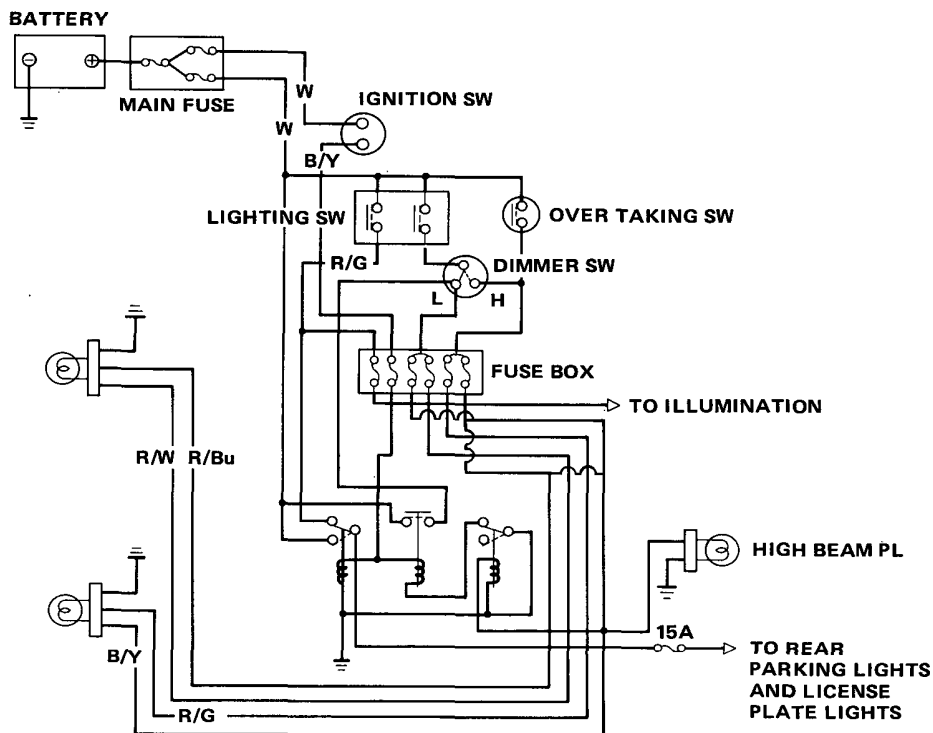

Day Time Running Light Headlight Washer & Wiper

Day Time Running Relay Testing

- (1) Check for continuity between the (2) and (7) terminals when the battery positive terminal is connected to the (4) terminal and the negative to the (5) terminal.
- (2) Check for continuity between the (2) and (1) terminals when the battery positive terminal is connected to the (4) terminal and the negative to the (5) terminal.
- (3) Check for no continuity between the terminals (2) and (1) when the battery positive terminal is connected to the (4) and (3) terminals and the negative to the (5) terminal.

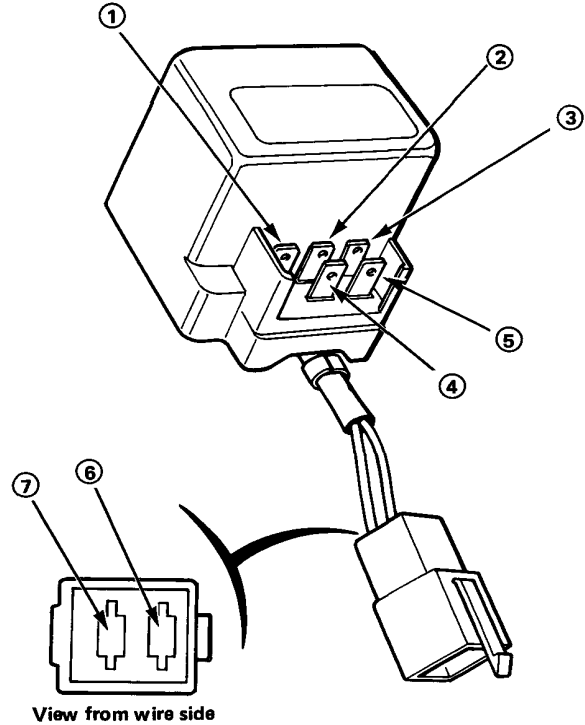

Headlight Washer & Wiper Wiring Diagram

