




Dashboard

Component Removal/Installation

NOTE: Take care not to scratch or score the dashboard and instrument panel.

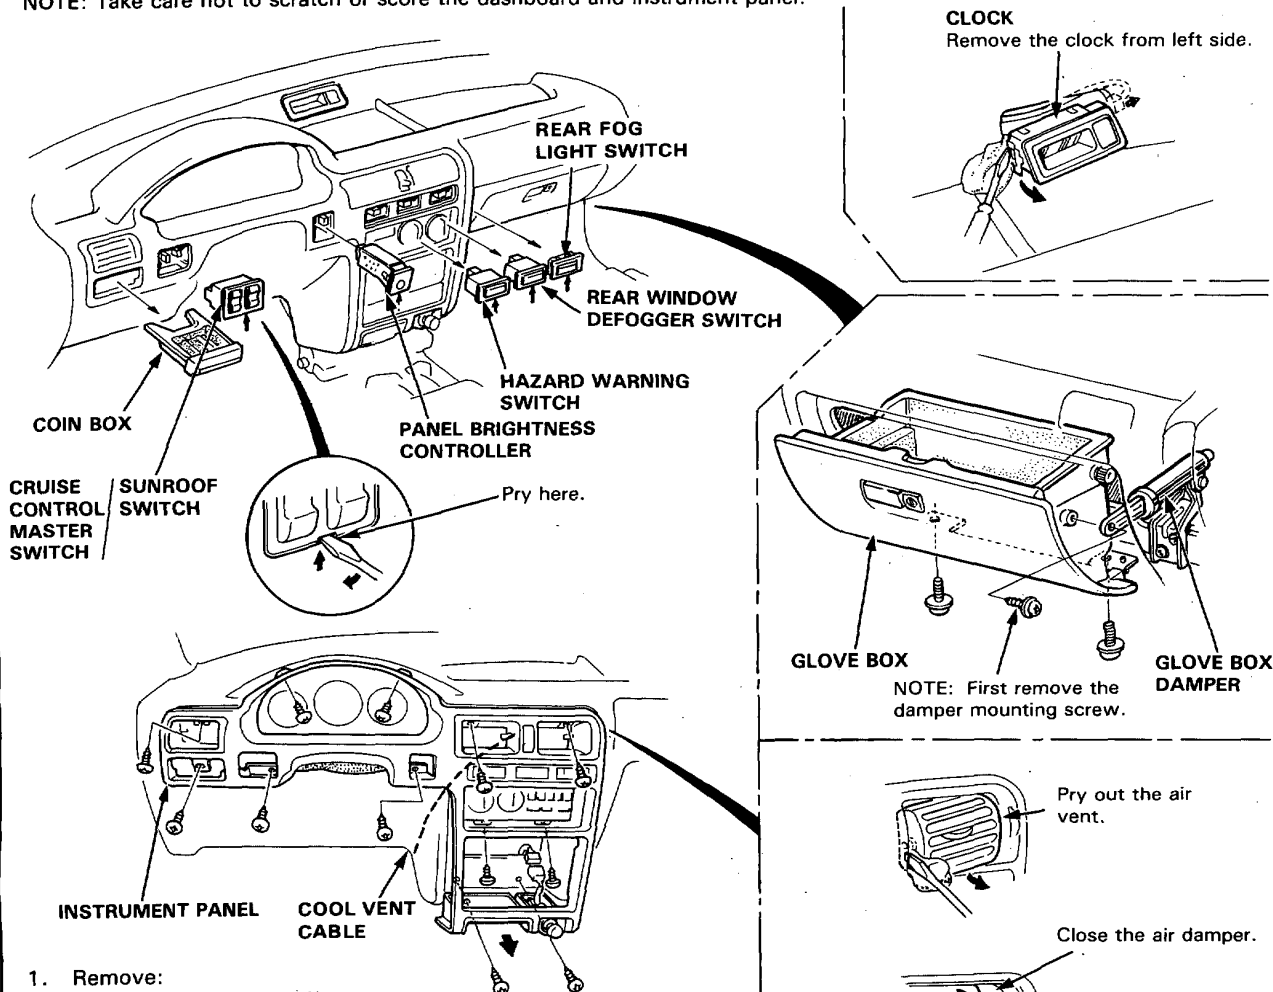

1. Remove:
 - Console (page 14-49).
 - Ashtray and ashtray holder
 - Stereo cassette/radio
 - Coin box, cruise control master switch • sunroof switch and panel brightness controller.
 - Side and Center air vents.
 - Disconnect the cool vent cable (See section 15).
2. Remove the 12 mounting screws and disconnect the connectors.
3. Carefully pull out the instrument panel from the dashboard.

STEREO CASSETTE/RADIO

Remove the console, ashtray and ashtray holder. Loosen the 2 screws from underneath and disconnect the wire harness (antenna lead), then pull the stereo cassette/radio out half-way and separate the pocket.

