



## Relay

### Test

There should be continuity between the A and B terminals when power and ground are connected to the C and D terminals.

There should be no continuity when power is disconnected.

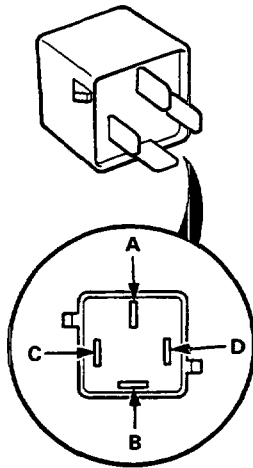

## Heater Fan Switch

### Test

Check for continuity between the terminals according to the table below.

#### SWITCH CONNECTION

Terminal Position	①	②	③	④	⑤	⑥	⑦
O							
I	○	○	○				
II	○	○	○	○			
III	○	○	○	○	○		
IV	○	○	○	○	○	○	
V	○	○	○	○	○	○	○

