


Front Grille/Side Sill Panel


Front Grille Replacement

1. Remove the 5 screws.
2. Push the clips on each side with a flat tip screwdriver as shown, then remove the front grille.
3. Set the clips on to the front grille, then install the front grille in the reverse order removal.

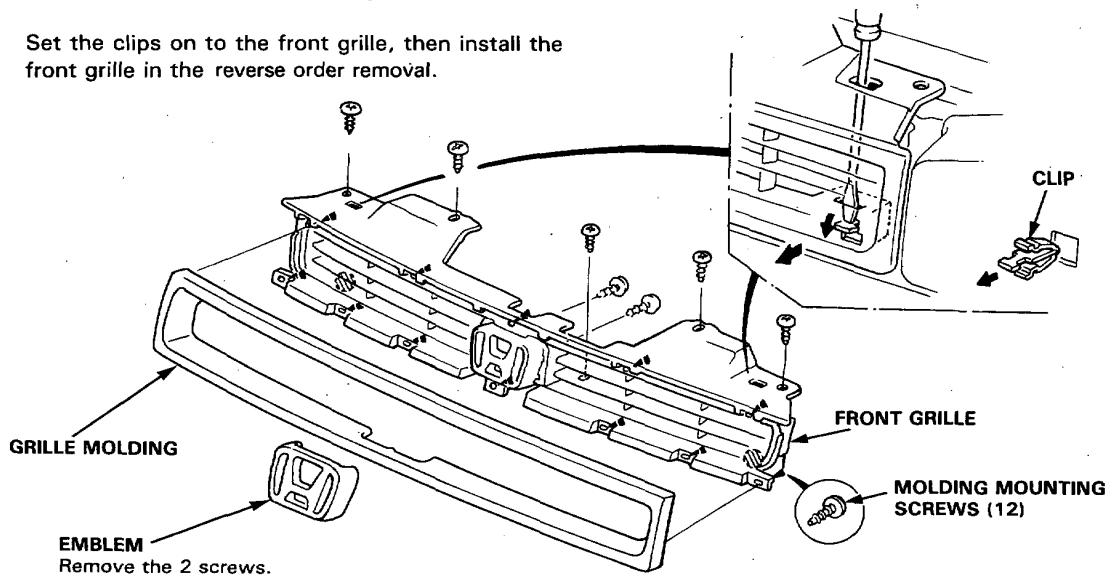

Side Sill Panel Replacement

1. Remove the mud guard.
2. Detach the all lower screws and clips.
3. Pull the side sill panel out and remove the side clips, then remove the side sill panel.

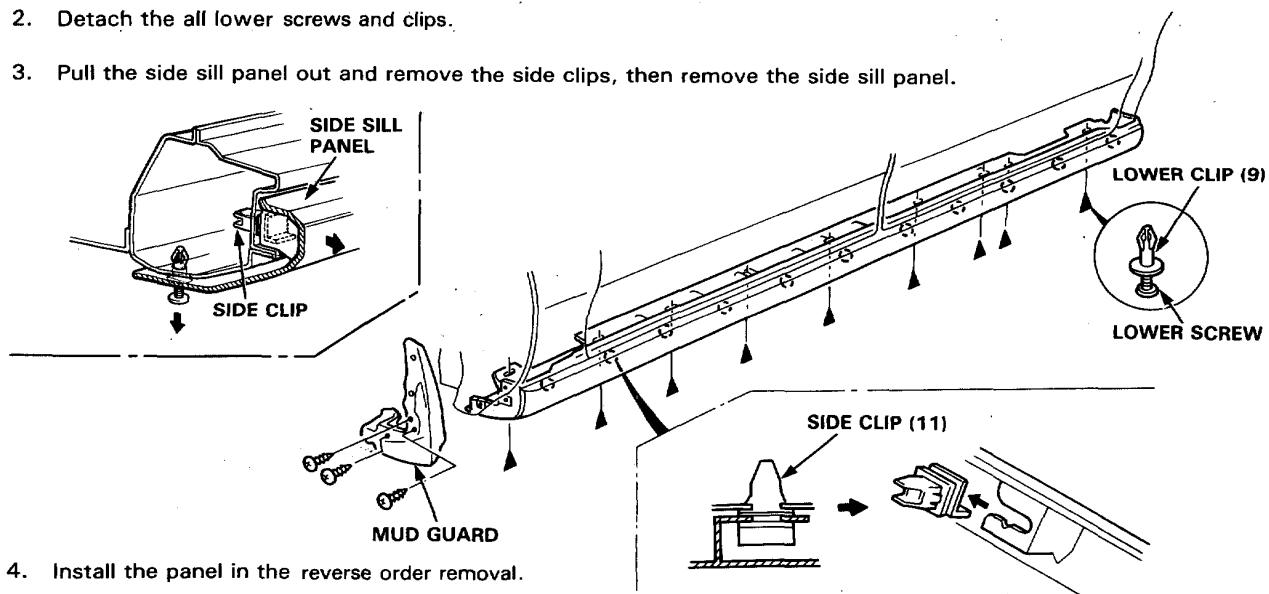

4. Install the panel in the reverse order removal.

NOTE: If necessary, replace any damaged clips.