




NOTE:

- Use new O-rings when reassembling.
- Apply oil to O-rings before installation.
- Use liquid gasket, Part No. 0Y740 – 99986.
- Clean the oil pan gasket mating surfaces before installing.
- Apply liquid gasket to the recesses of the oil pan gasket (see page 7-21).

CAUTION: Do not overtighten the drain bolt.

D16Y2, D15Z3 engines:

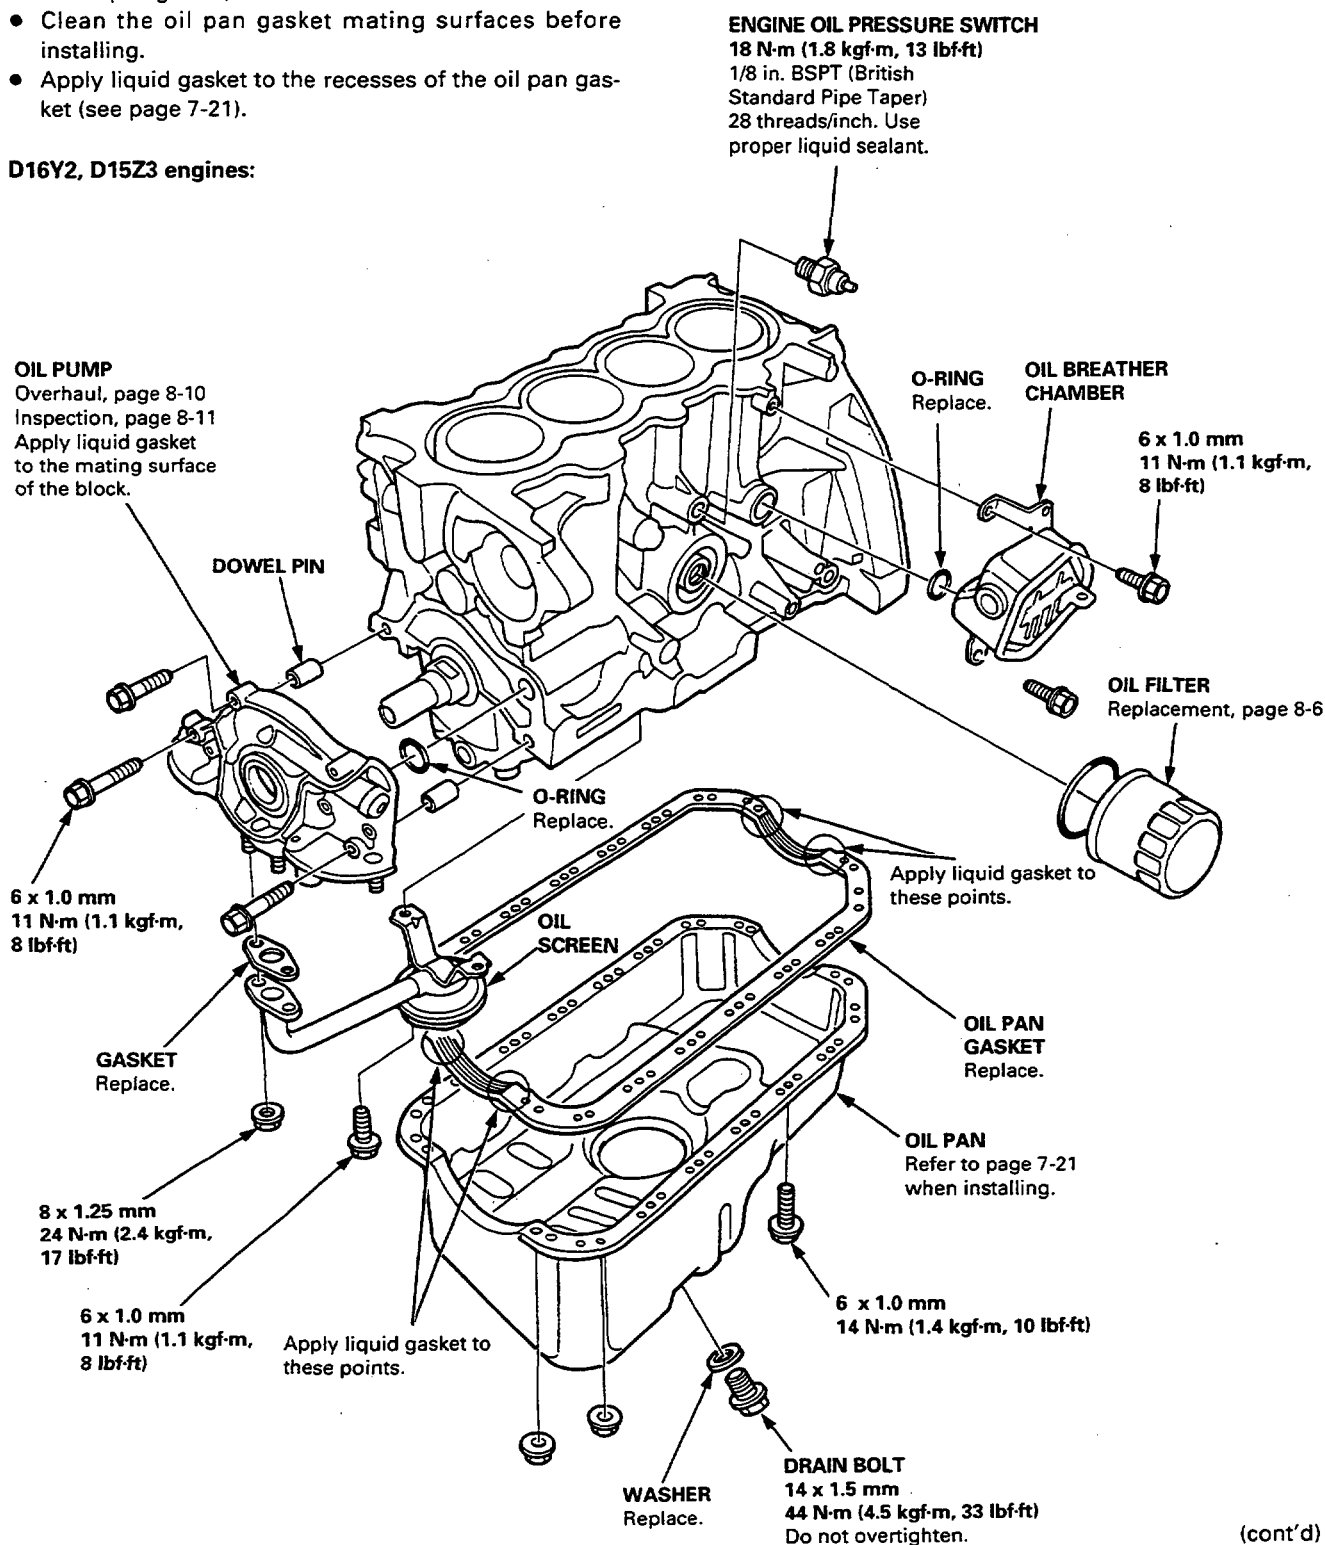

(cont'd)

Illustrated Index

(cont'd)

NOTE:

- Use new O-rings when reassembling.
- Apply oil to O-rings before installation.
- Use liquid gasket, Part No. 0Y740 - 99986.
- Clean the oil control orifice before installing.
- Clean the oil pan gasket mating surfaces before installing.
- Apply liquid gasket to the recesses of the oil pan gasket (see page 7-21).

CAUTION: Do not overtighten the drain bolt.

D16Y3, D14A2 engines:

