


Front Bumper

Replacement


1. Remove the front turn lights, then disconnect the wire connectors.
2. Remove the bumper lower mount bolts and the bumper mount bolts.
3. Remove the bumper by sliding it to the front.



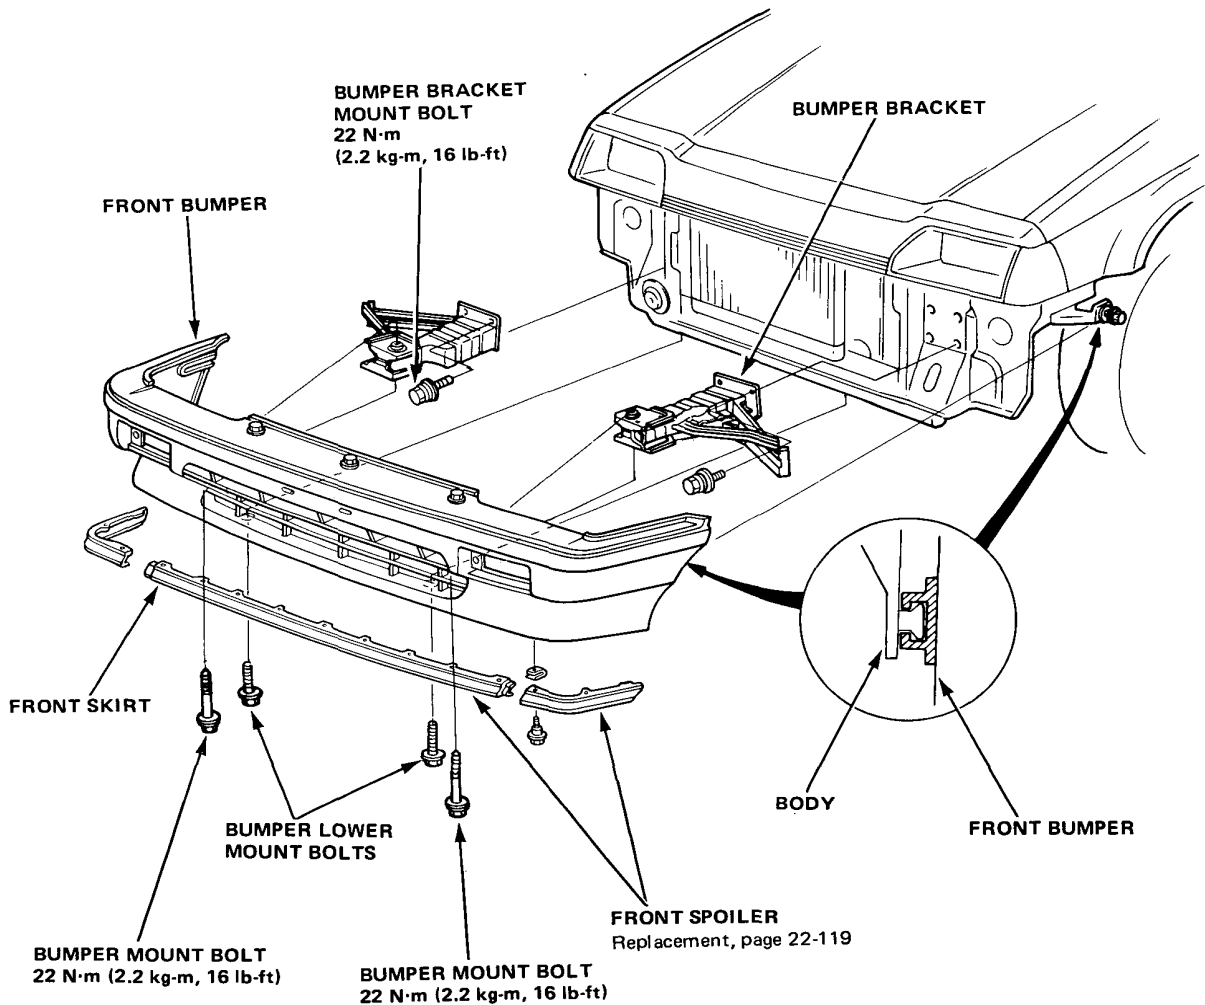


Front Spoiler Replacement


1. Remove the front spoiler by removing the 2 sus-clips and the 7 mount bolts, and cutting off the end of the 6 plastic rivets.

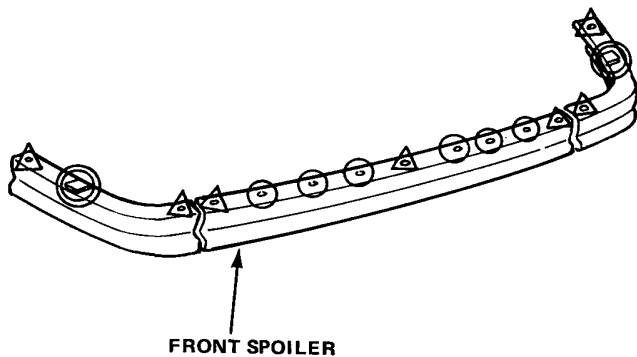


○ : Plastic rivet locations

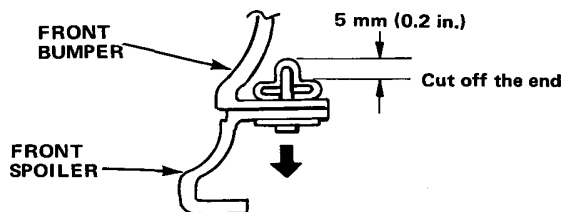


△ : Mount bolt locations

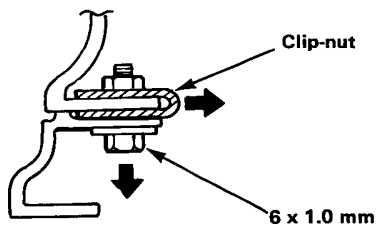

○ : Sus-clip locations



2. Install the front spoiler in the reverse order of removal. Use bolts and nuts at the points where plastic rivets were used to retain the spoiler as shown.

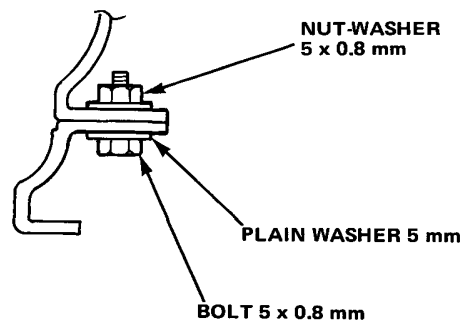


Rear Bumper

Replacement

1. Disconnect the license light wire connector.
2. For the rear fog light equipped model, remove the rear fog lights (Coupe and 4D H/B).
3. Remove the 2 bumper mount bolts (except 4D H/B) or the 8 bumper mount screws (4D H/B).
4. Remove the bumper by sliding it to the rear.

Coupe, 2D H/B, and 4D:

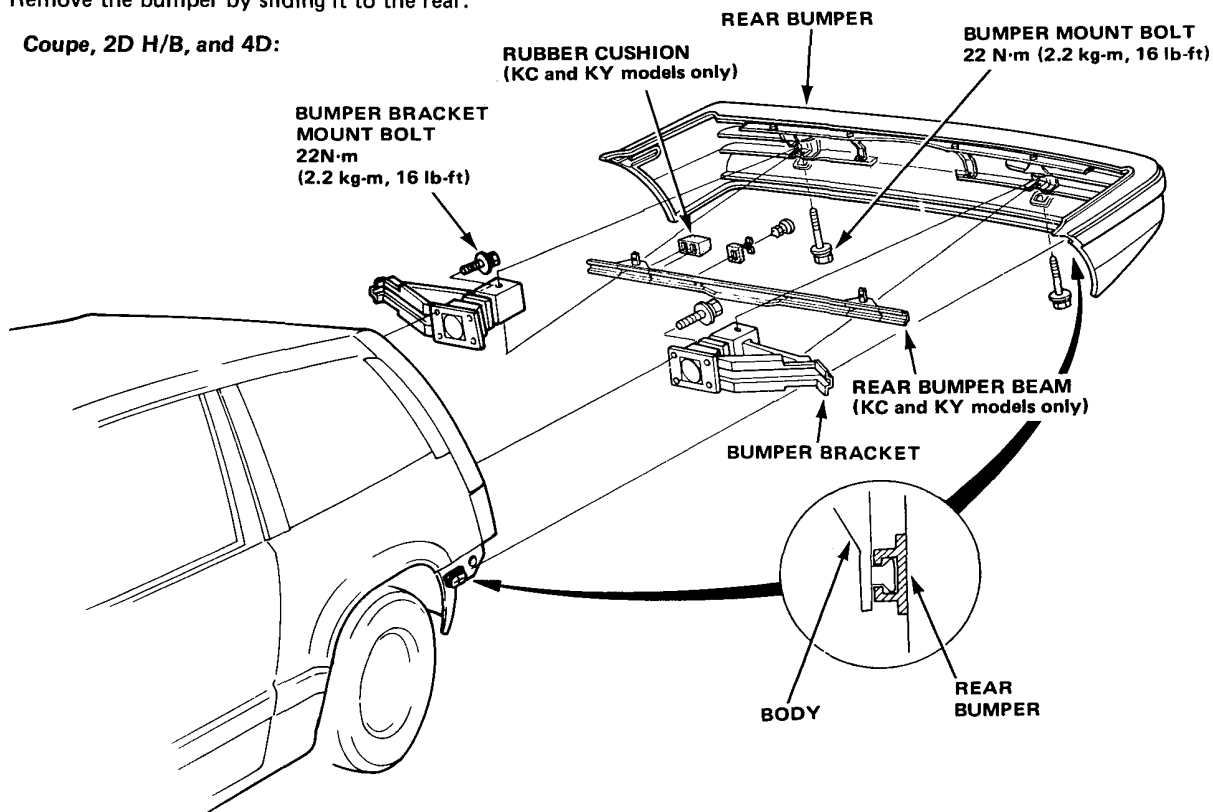

4D H/B:

