


Clock




Circuit Diagram

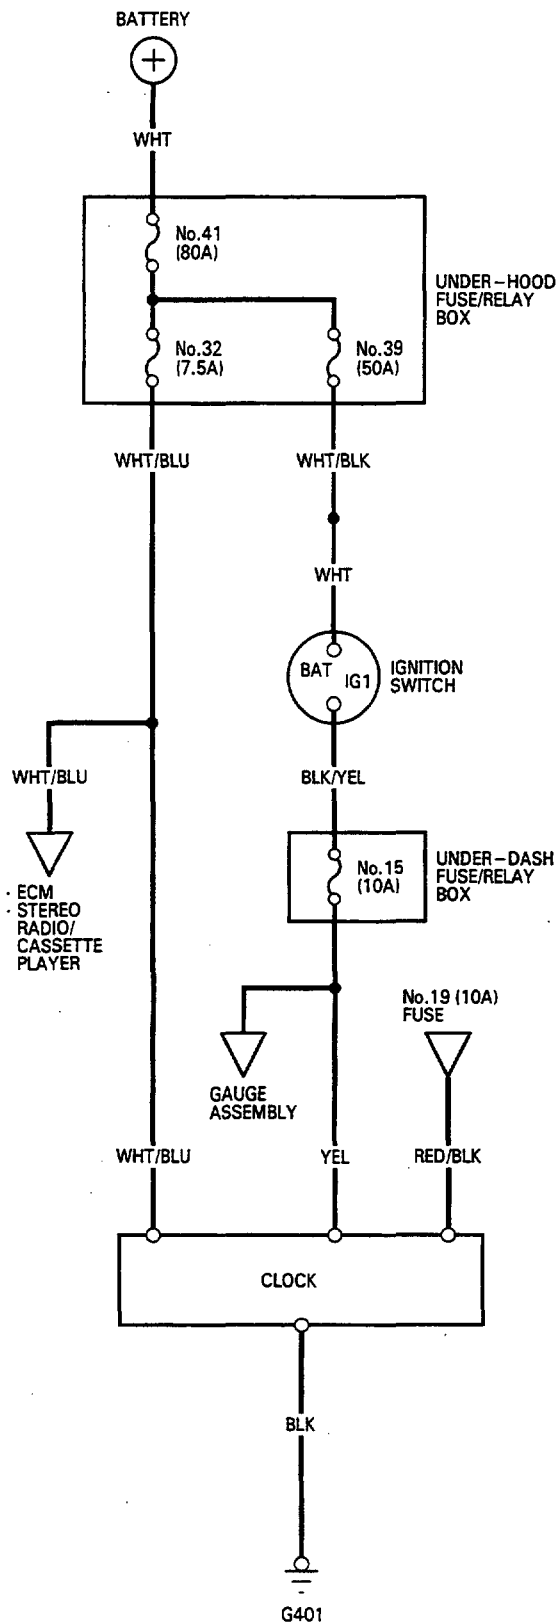


Removal

1. Remove the rear console (see section 20).
2. Remove the front console (see section 20).
3. Disconnect the 4-P connector from the clock.
4. Remove the two screws.

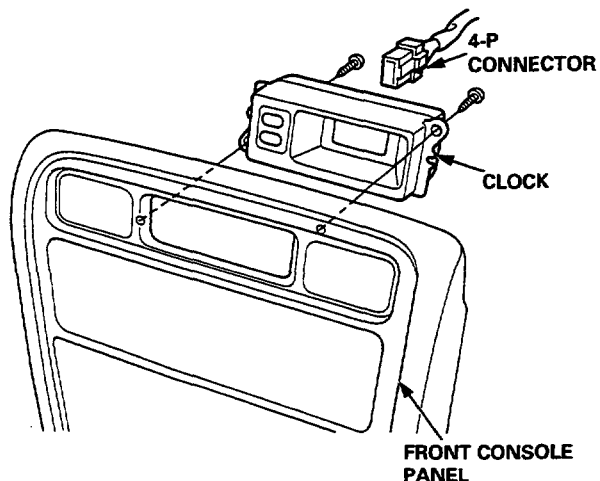

Terminal

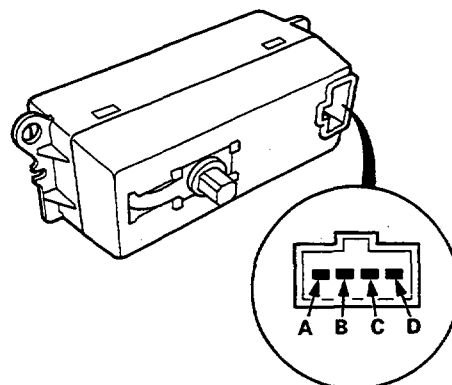

Terminal	Wire	Connects to
A	BLK	Ground (G401)
B	RED/BLK	Lights-on signal
C	YEL	IG1 (Main clock power supply)
D	WHT/BLU	Constant power (Time memory)