




Motor, Drain Tube, and Frame Replacement

CAUTION: Be careful not to damage the seats or other interior trim.

1. Remove the sliding glass (page 14-38) and the headliner (page 14-43).
2. Disconnect the motor and limit switch wire harness; remove the clips securing the dome light wire harness.
3. Remove the sunroof motor by removing the two bolts and three nuts.
4. Disconnect the drain tubes.
5. Remove the ten 6 x 16 mm mounting bolts from the frame, and remove the frame from the car.

NOTE: You may require assistance when removing the frame.

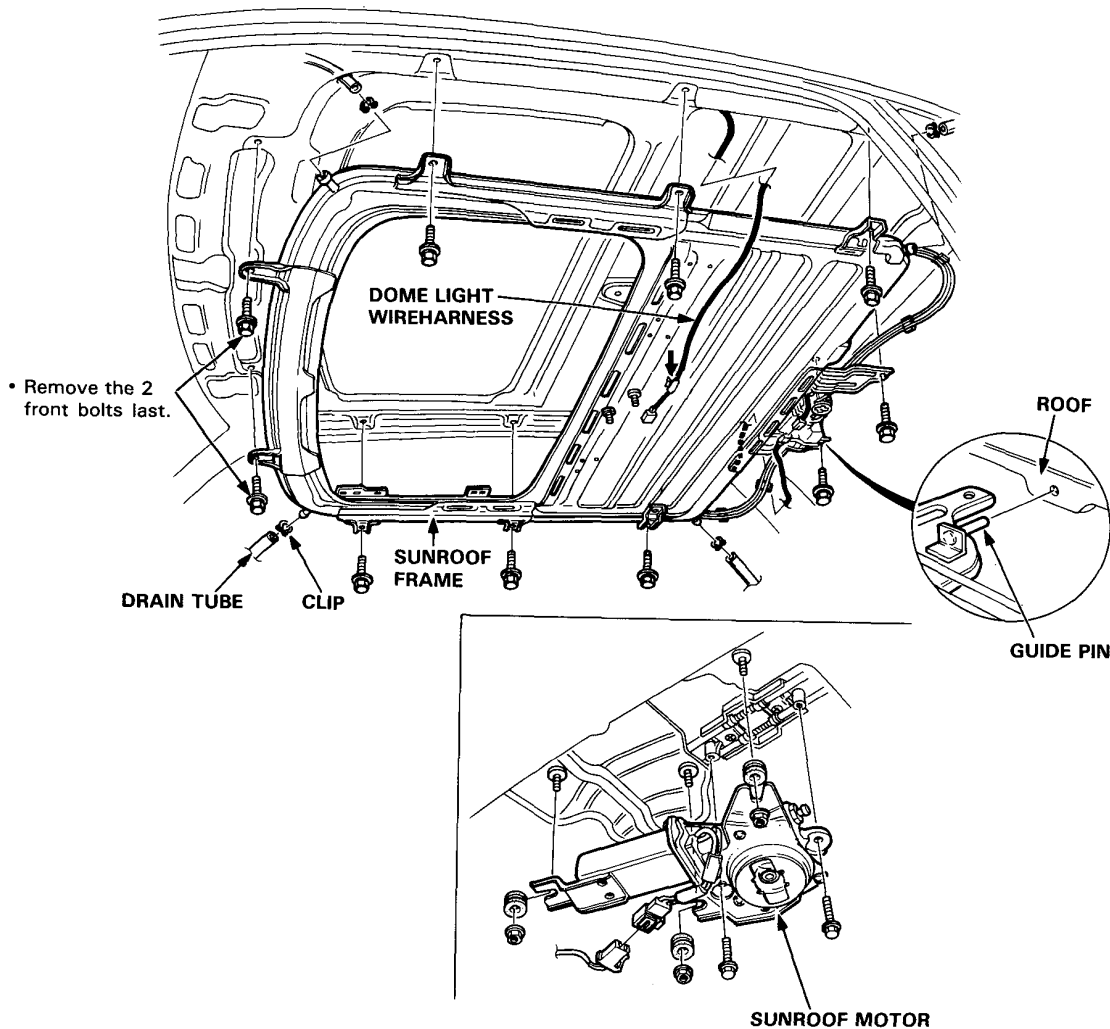

6. To install, insert the frame's rear pins into the body holes, then install parts in the reverse order of removal.

NOTE: Install the tube clips with the ends facing the side to ease installation of the headliner.