
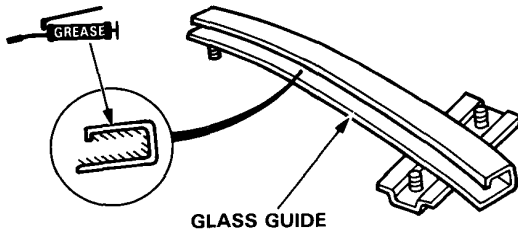
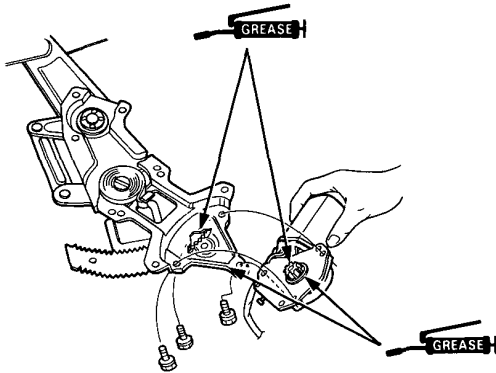


# Doors

## Assembly


Assemble the door in the reverse order of disassembly, and also:

1. Grease all the sliding surfaces of the window regulator where shown.

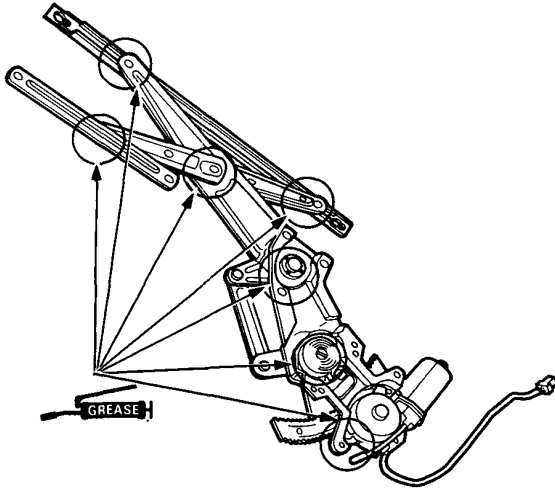

2. Roll the glass up and down to see if it moves freely without binding. Also make sure that there is no clearance between the glass and door upper weatherstrip when the glass is closed. Adjust the position of the door glass as necessary (pages 20-9 to 12).

3. Fix the wire harness correctly on the door.

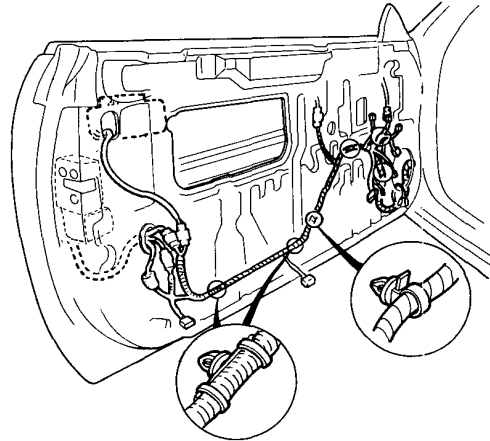

4. When reinstalling the plastic cover, apply adhesive along the edge where necessary to maintain a continuous seal and prevent air/water leaks.

