



BODY DIMENSION DRAWINGS

ENGINE COMPARTMENT

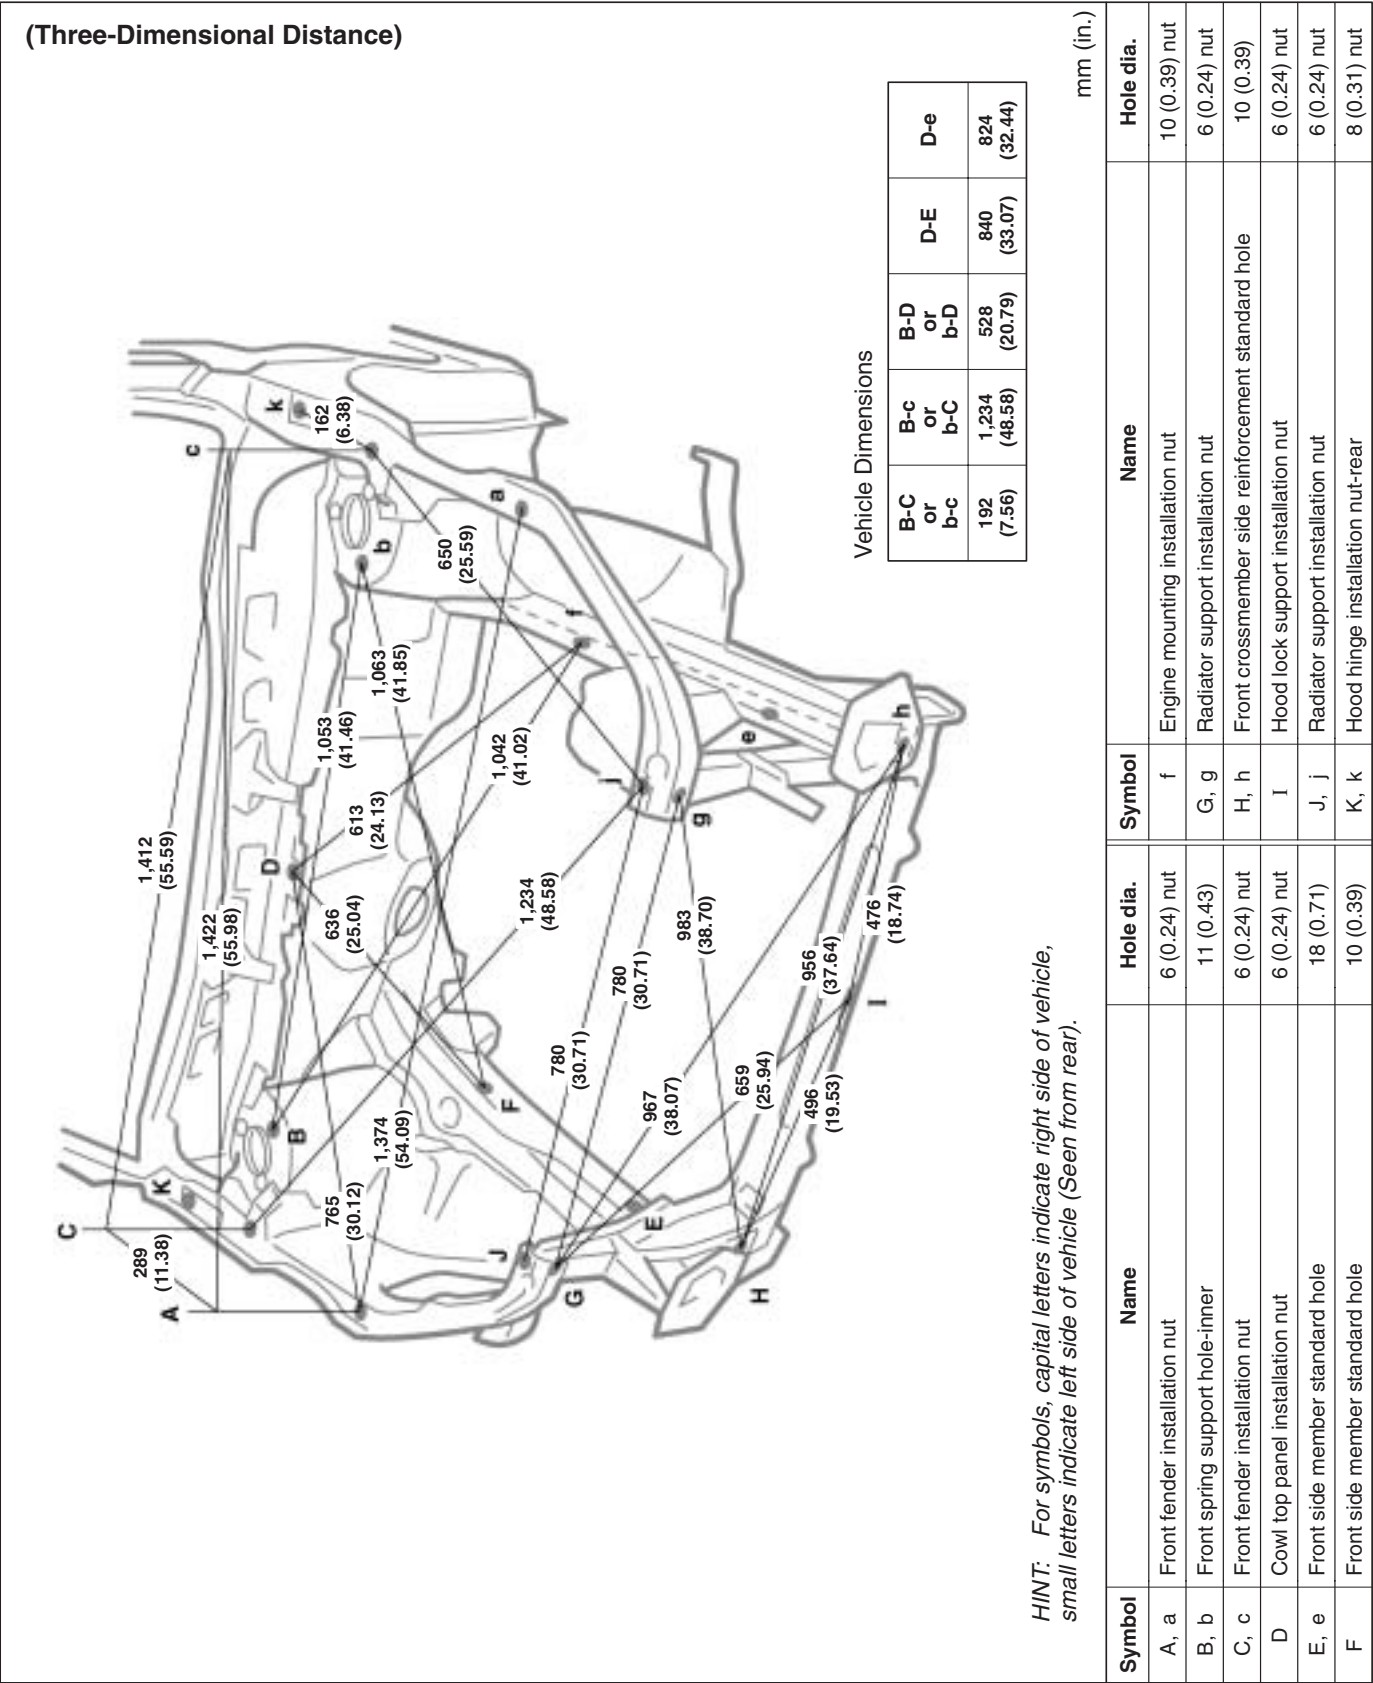

BODY OPENING AREAS (Side View-Front)

(Three-Dimensional Distance)

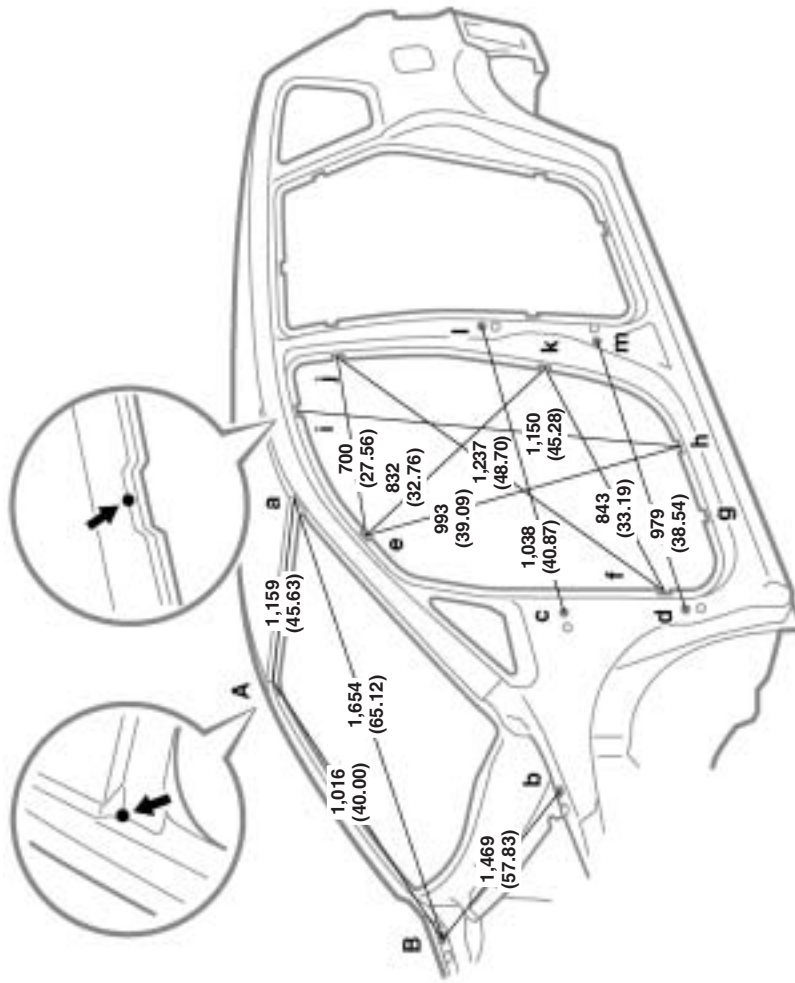

Vehicle Dimensions Left ↔ Right

E-e	F-f	G-g	H-h	I-i	J-j	K-k
1,285 (50.59)	1,495 (58.86)	1,520 (59.84)	1,520 (59.84)	1,162 (45.75)	1,285 (50.59)	1,484 (58.4)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

E-f or e-F	E-h or e-H	E-j or e-J	F-j or f-J	F-k or f-K	H-i or h-I
1,604 (63.15)	1,714 (67.48)	1,463 (57.60)	1,857 (73.11)	1,711 (67.36)	1,757 (69.17)

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel/ Front body pillar adjoining portion	—	H, h	Rocker panel assembly mark	—
B, b	Hood hinge installation nut	8 (0.31) nut	I, i	Roof side rail assembly mark	—
C, c	Front door hinge installation nut	8 (0.31) nut	J, j	Center body pillar assembly mark	—
D, d	Front door hinge installation nut	8 (0.31) nut	K, k	Center body pillar assembly mark	—
E, e	Front body pillar assembly mark	—	L, l	Rear door hinge installation hole	13 (0.51)
F, f	Front body pillar assembly mark	—	M, m	Rear door hinge installation nut	8 (0.31) nut
G, g	Rocker panel assembly mark	—	—	—	—

BODY OPENING AREAS (Side View-Rear)

(Three-Dimensional Distance)

Vehicle Dimensions Left ↔ Right

N-n	O-o	P-p	Q-q	R-r	S-s
1,316 (51.81)	1,479 (58.23)	1,519 (59.80)	1,139 (44.84)	1,271 (50.04)	1,497 (58.94)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).


mm (in.)

G-p or g-p	I-q or i-q	N-r or n-R	O-s or o-S	P-q or p-Q	R-s or r-S
1,985 (78.15)	1,326 (52.20)	1,548 (60.94)	1,728 (68.03)	1,751 (68.94)	1,606 (63.23)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
G, g	Rocker panel assembly mark	—	P, p	Rocker panel assembly mark	—
I, i	Roof side rail assembly mark	—	Q, q	Roof side rail assembly mark	—
N, n	Center body pillar assembly mark	—	R, r	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	S, s	Quarter panel assembly mark	—

BODY OPENING AREAS (Rear View)

(Three-Dimensional Distance)

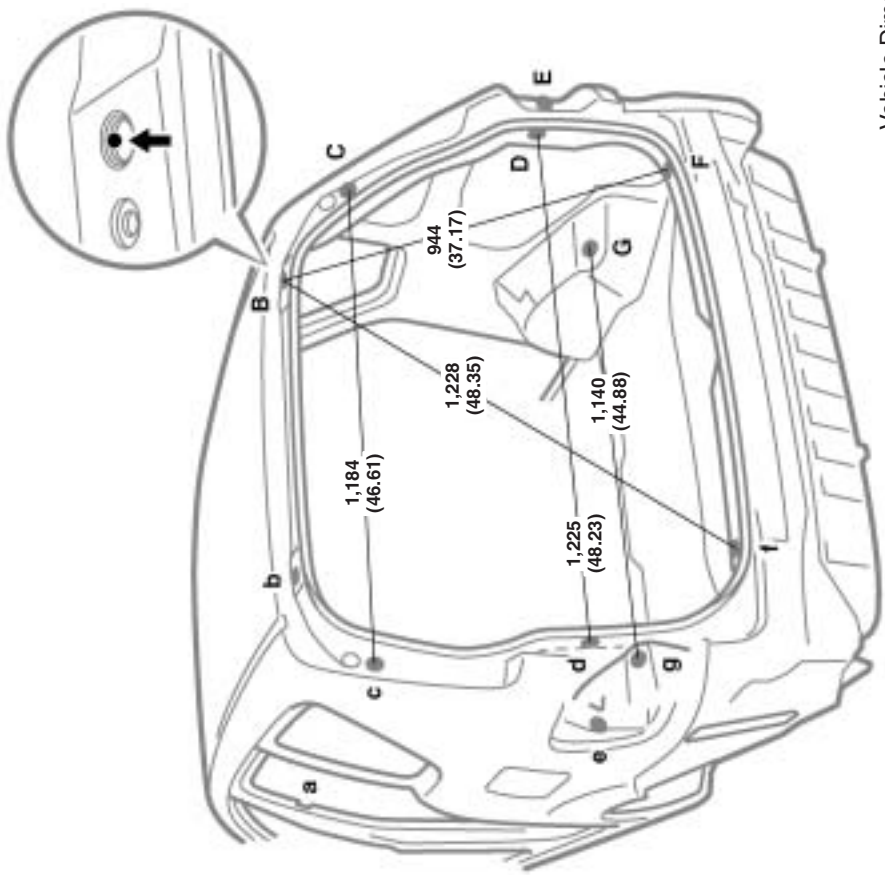


Vehicle Dimensions

A-G or a-g	A-g or a-G	E-e
1,714 (67.48)	2,107 (82.95)	1,556 (61.26)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Center body pillar assembly mark	—	E, e	Quarter panel standard hole	10 (0.39)
B, b	Back door hinge installation hole	12 (0.47)	F, f	Back door scuff plate installation hole	8.5 (0.335)
C, c	Back door damper stay installation nut-lower	6 (0.24) nut	G, g	Rear shock absorber installation hole	24 (0.94)
D, d	Deck trim side panel installation hole	8.5 (0.335)	—	—	—

UNDER BODY

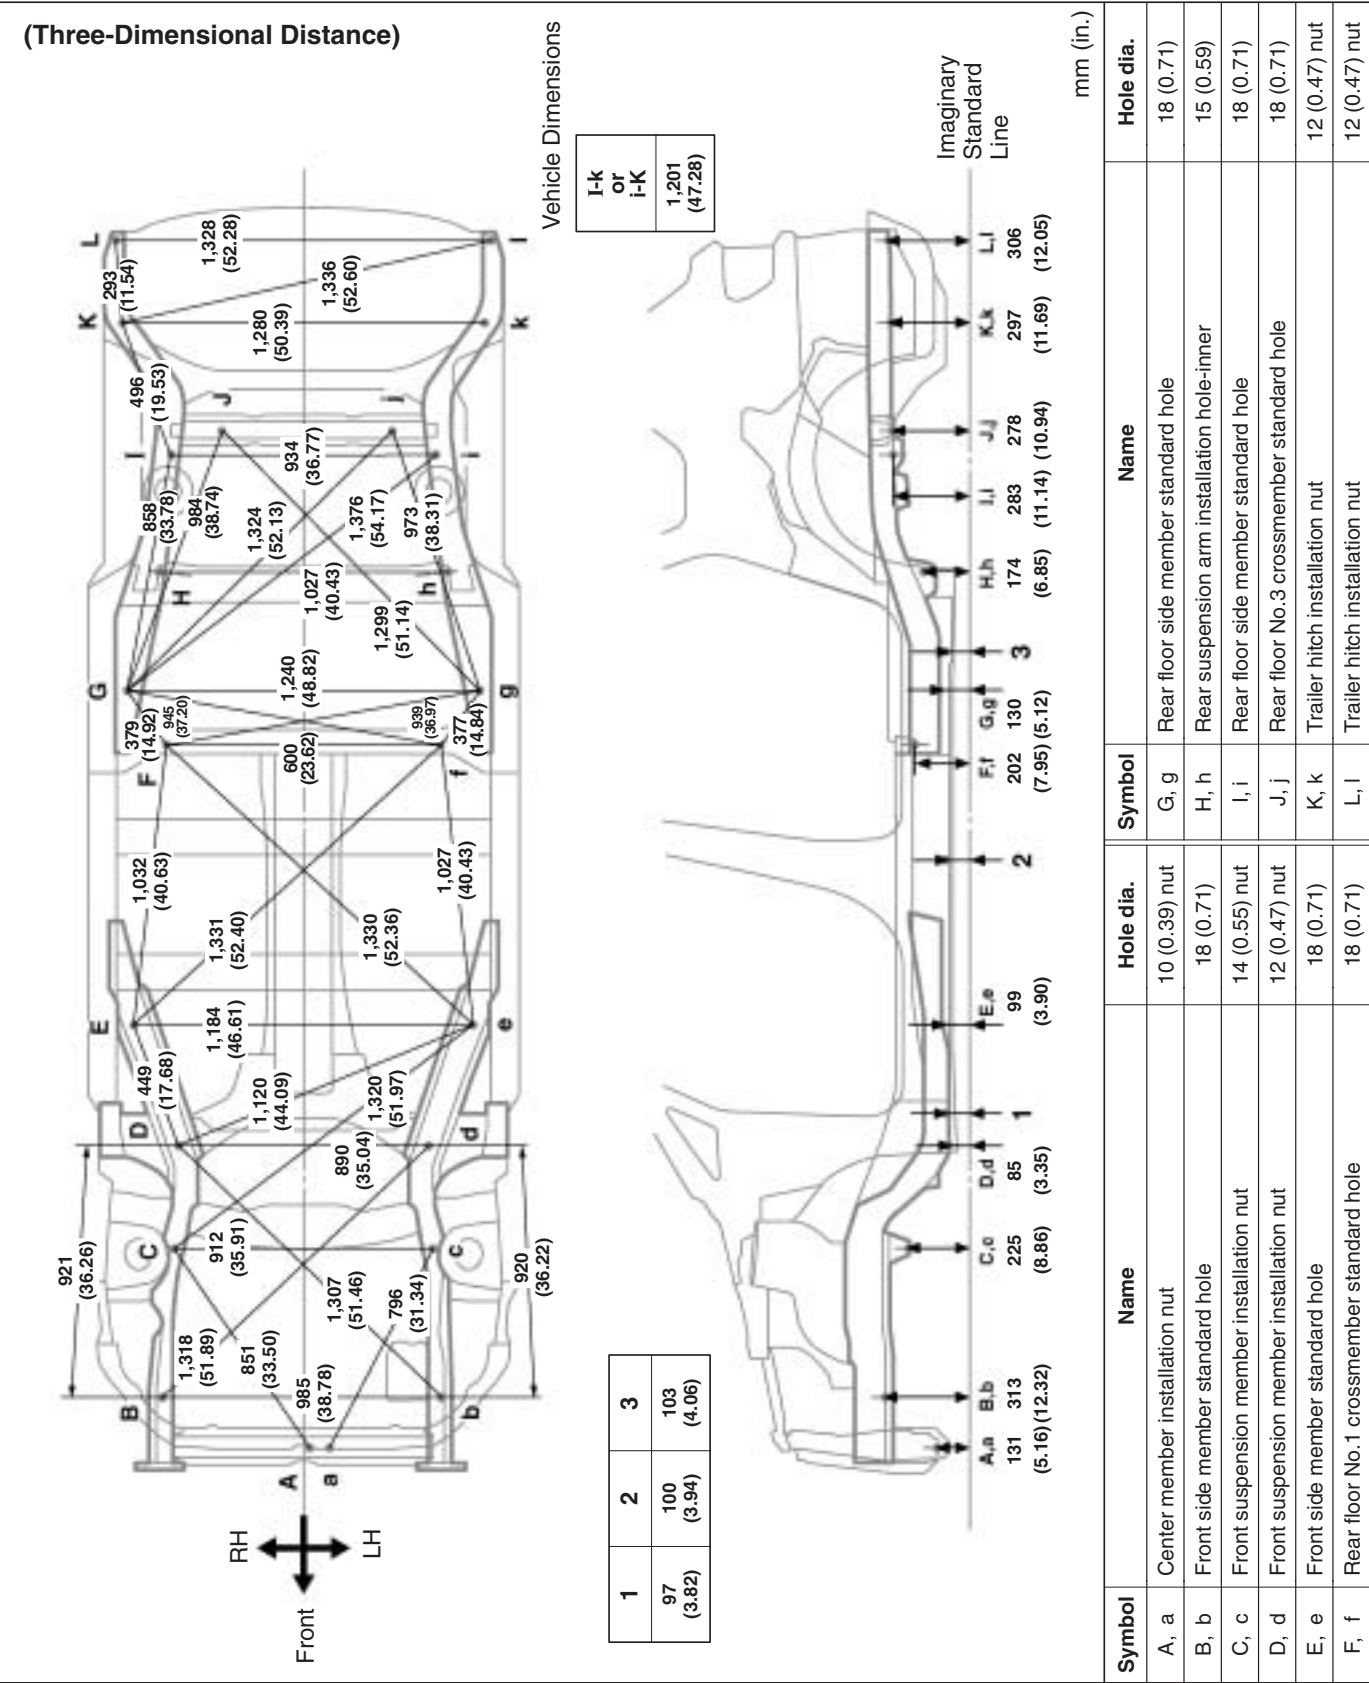

UNDER BODY (Cont'd)

(Two-Dimensional Distance)

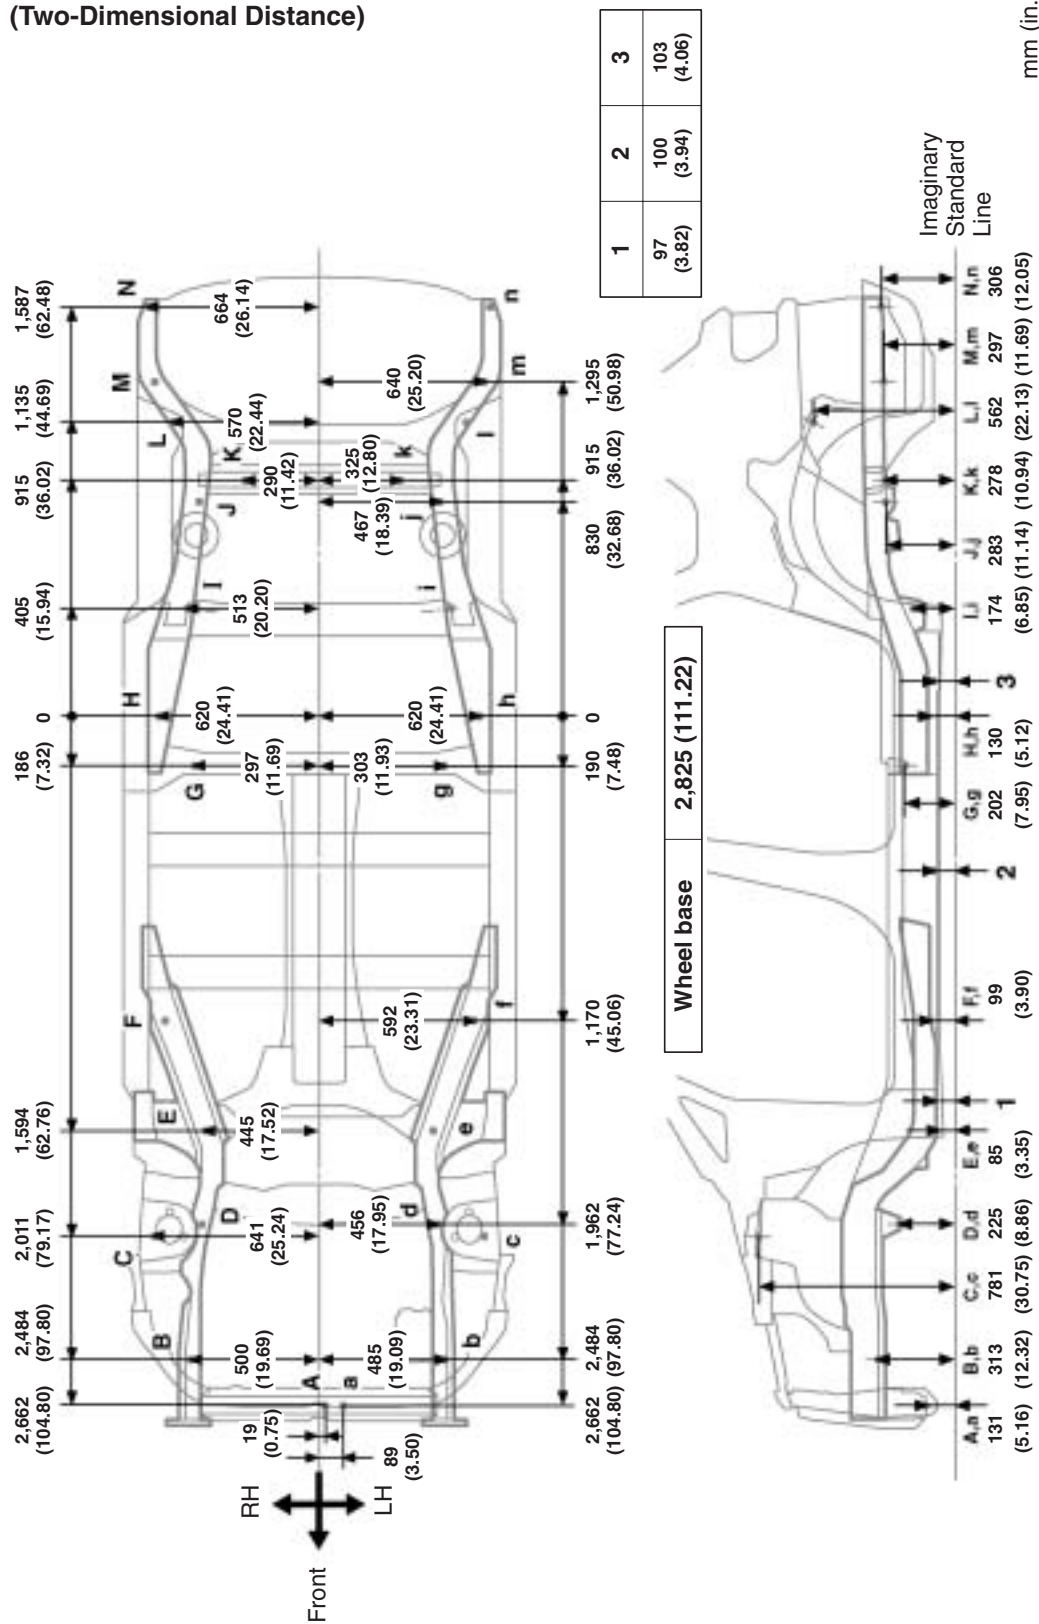

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Center member installation nut	10 (0.39) nut	H, h	Rear floor side member standard hole	18 (0.71)
B, b	Front side member standard hole	18 (0.71)	I, i	Rear suspension arm installation hole-inner	15 (0.59)
C, c	Front spring support hole-outer	13 (0.51)	J, j	Rear floor side member standard hole	18 (0.71)
D, d	Front suspension member installation nut	14 (0.55) nut	K, k	Rear floor No.3 crossmember standard hole	18 (0.71)
E, e	Front suspension member installation nut	12 (0.47) nut	L, l	Rear shock absorber installation hole	24 (0.94)
F, f	Front side member standard hole	18 (0.71)	M, m	Trailer hitch installation nut	12 (0.47) nut
G, g	Rear floor No.1 crossmember standard hole	18 (0.71)	N, n	Trailer hitch installation nut	12 (0.47) nut