



6. Lubrication System

General

- The lubrication circuit is fully pressurized and oil passes through an oil filter.
- The trochoidal type oil pump is chain-driven by the crankshaft.
- The oil filter is attached downward from the crankcase to improve serviceability.
- Along with the adoption of the VVT-i system, the cylinder head is provided with a VVT-i controller and a camshaft timing oil control valve. This system is operated by the engine oil.

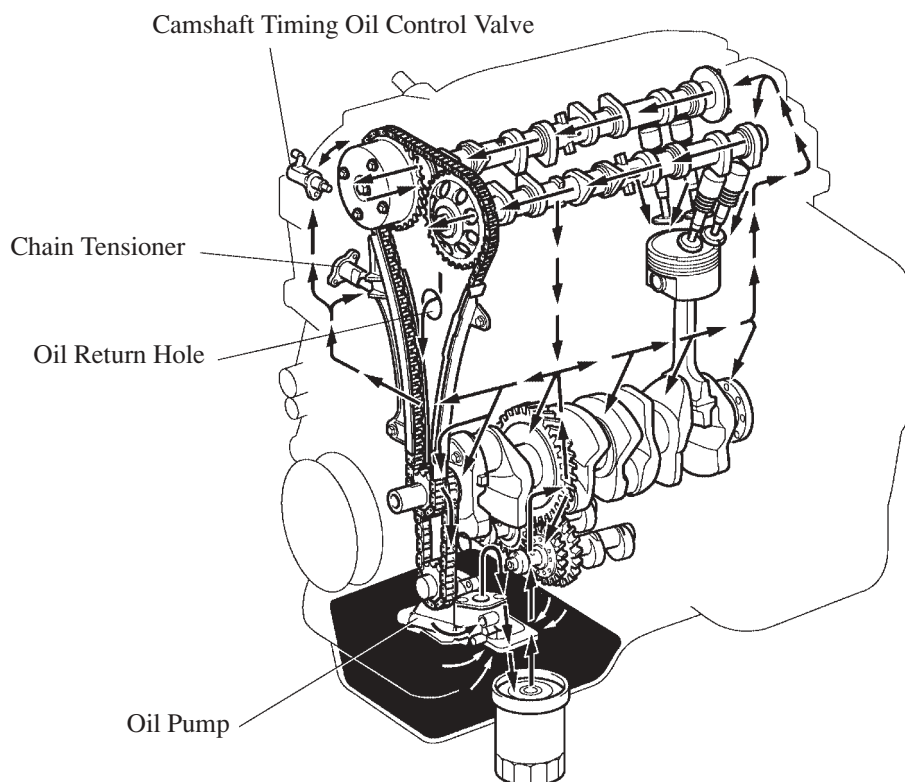

208EG07

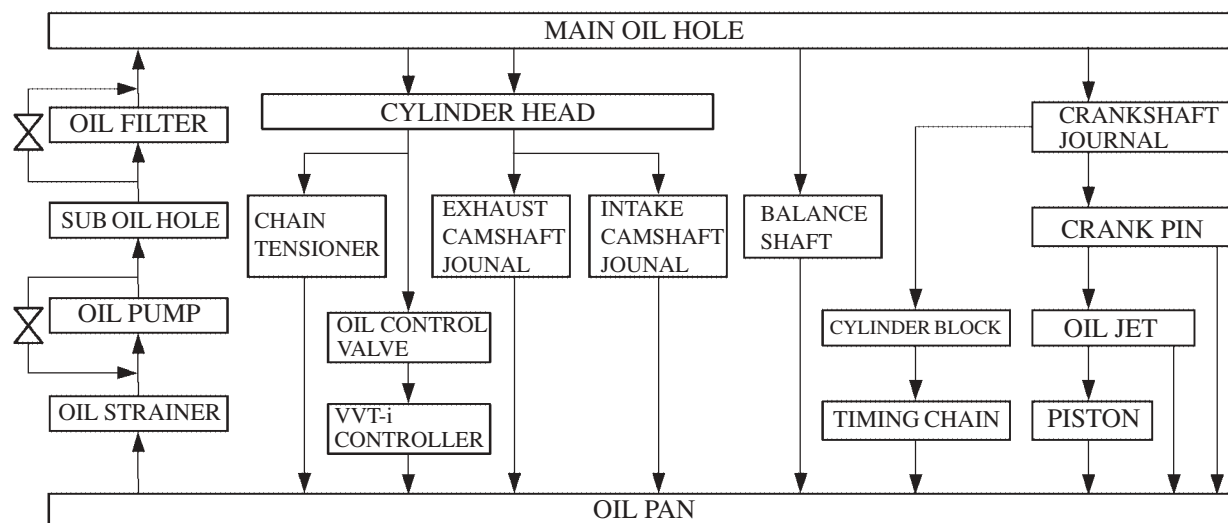


208EG08

► Specifications ◀

Oil Capacity	Dry	4.5 liters (4.8 US qts, 4.0 Imp. qts)
	with Oil Filter	3.8 liters (4.0 US qts, 3.3 Imp. qts)
	without Oil Filter	3.6 liters (3.8 US qts, 3.2 Imp. qts)

Oil Pump

- The trochoidal type oil pump is chain driven by the crankshaft, and fits compactly inside the timing chain cover.
- Friction has been reduced by means of 2 relief holes in the internal relief system.

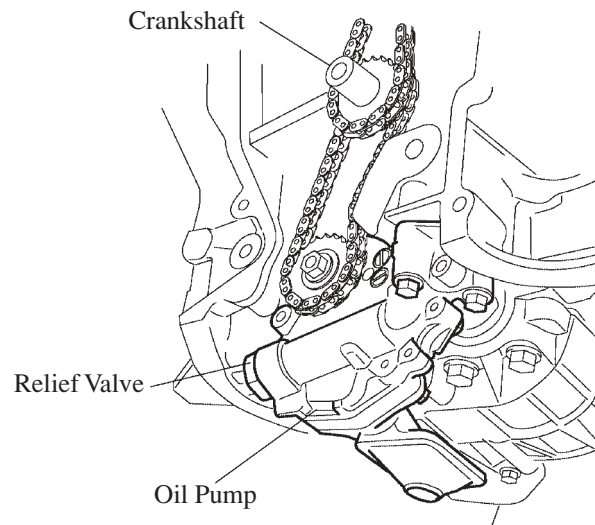

181EG43