



POWER SOURCE CIRCUIT (RADIO AND NAVIGATION ASSY)

CIRCUIT DESCRIPTION

This circuit provides the power to the radio and navigation assy.

WIRING DIAGRAM

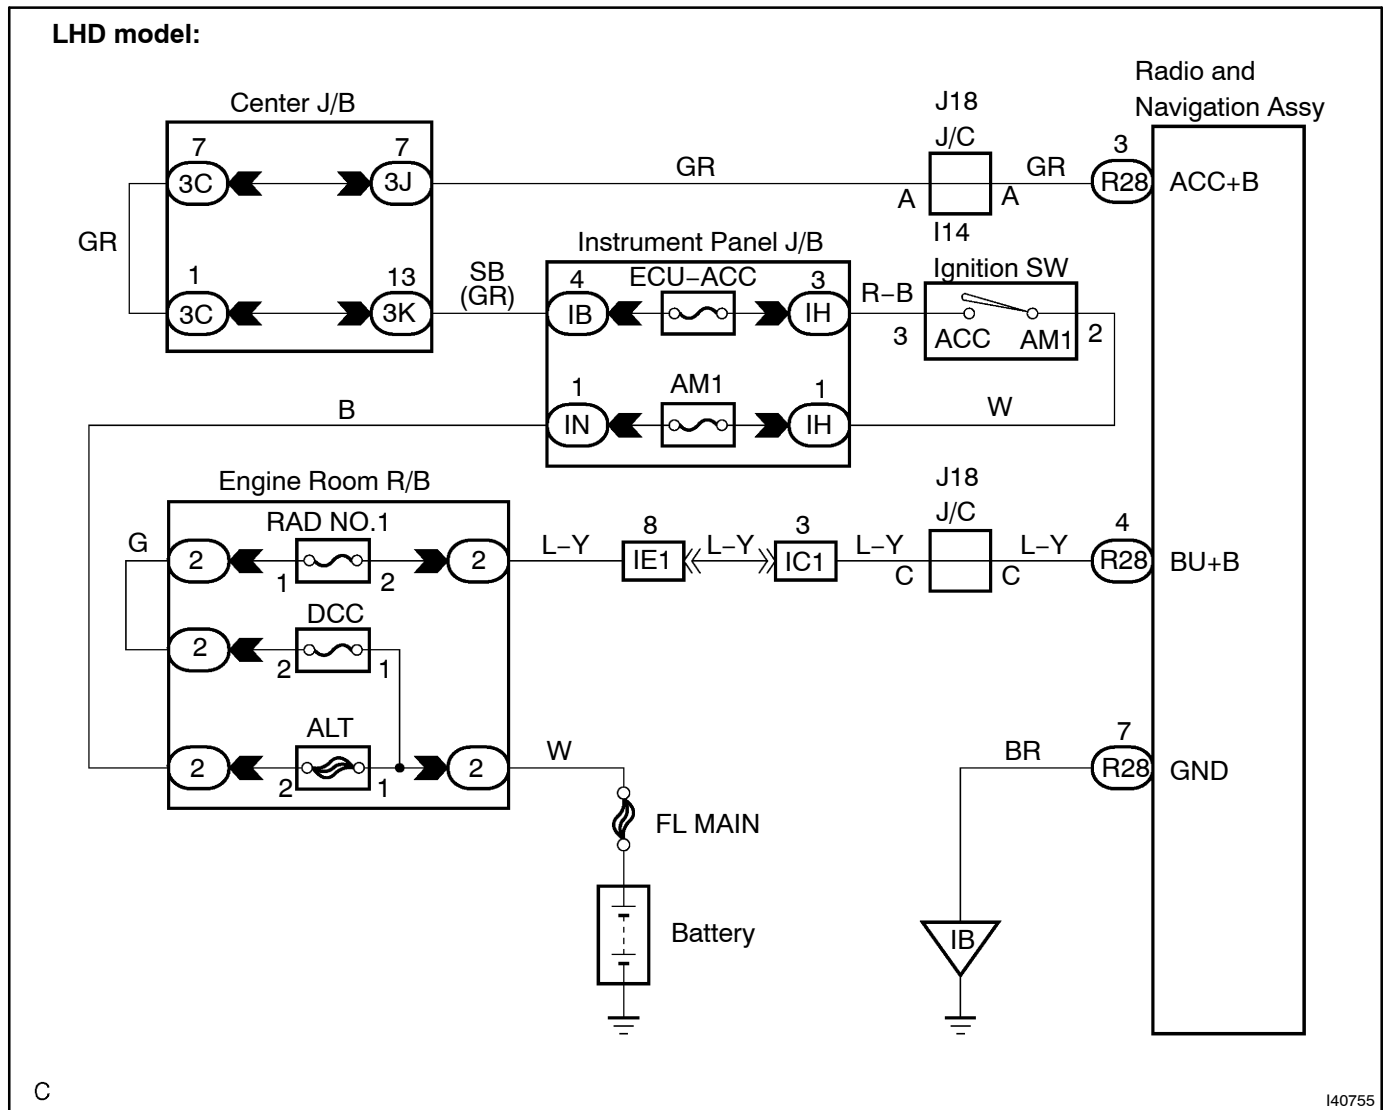

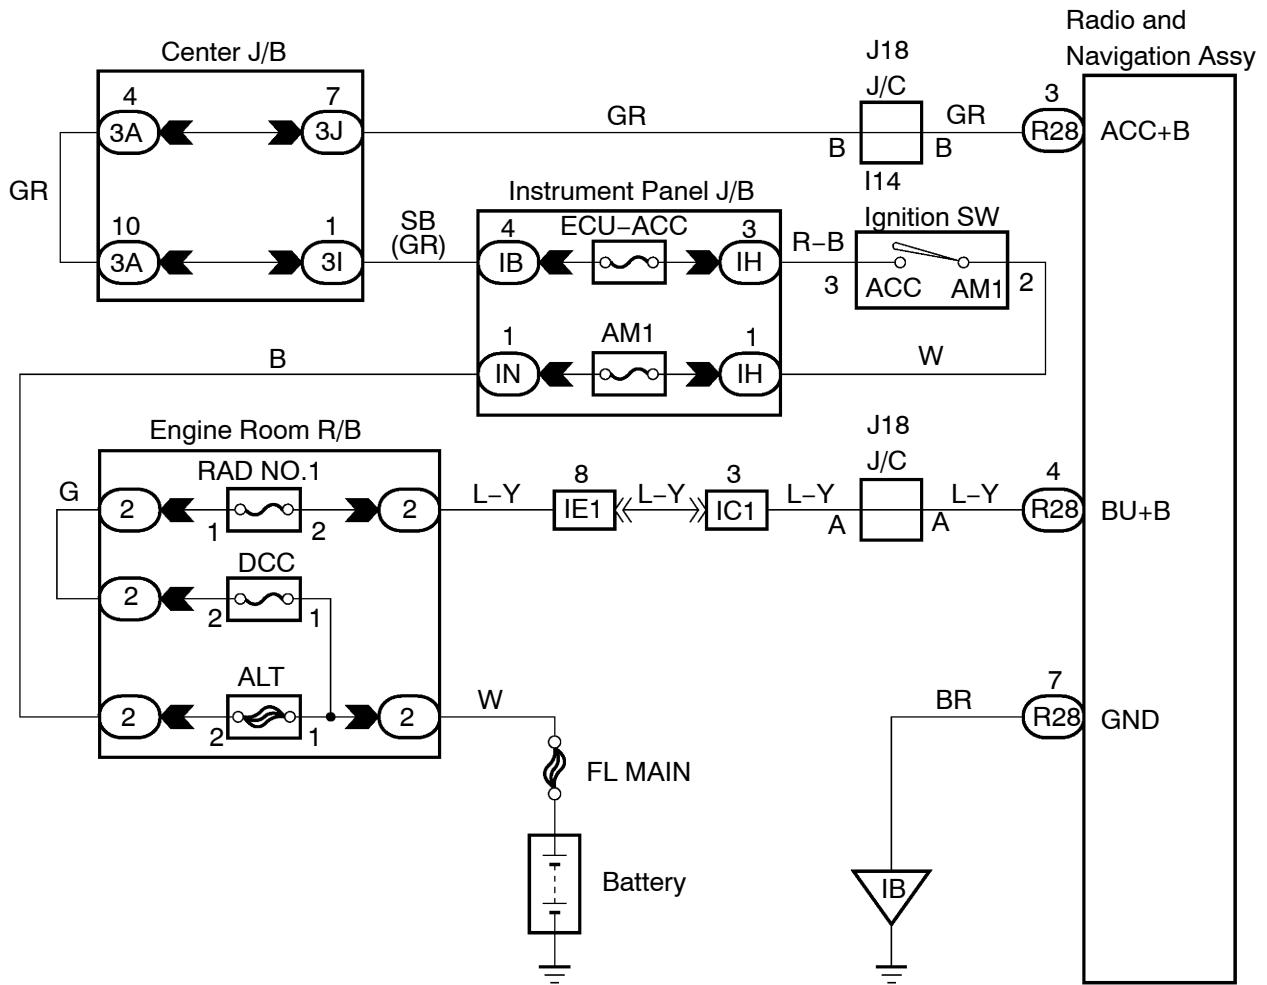
RHD model:

C

I40755

INSPECTION PROCEDURE

1 INSPECT RADIO AND NAVIGATION ASSY (BU+B, ACC+B, GND)

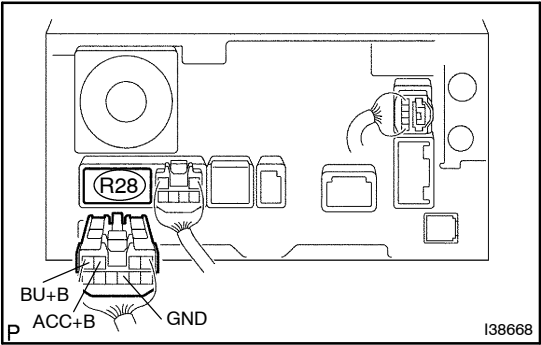

- (a) Disconnect the radio and navigation assy connector R28.
- (b) Measure the resistance according to the value(s) in the table below.

Standard:

Tester connection	Condition	Specified condition
GND - Body ground	Always	Below 1 Ω

- (c) Measure the voltage according to the value(s) in the table below.

Standard:

Tester connection	Condition	Specified condition
BU+B - GND	Always	10 to 14 V
ACC+B - GND	Ignition SW ACC	10 to 14 V

NG

REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

PROCEED TO NEXT CIRCUIT INSPECTION SHOWN IN PROBLEM SYMPTOMS TABLE
(SEE PAGE 05-1094)