


OVERHAUL

HINT:


- COMPONENTS: [SEE PAGE 65-1](#)
- Use the same procedures for the RH side and LH side.
- The procedures listed below are for the LH side.
- Installation is in the reverse order of removal.

1. REMOVE FRONT BUMPER ([SEE PAGE 76-2](#))

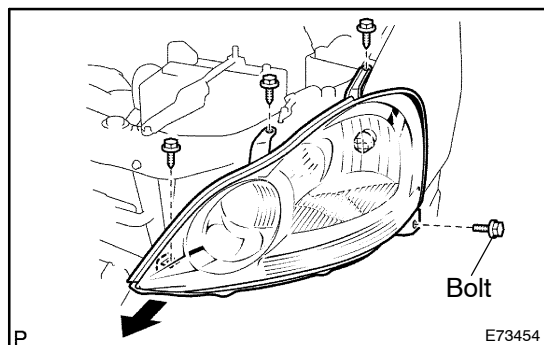


2. REMOVE LH HEADLAMP ASSY

- (a) Remove the 3 screws and bolt.
- (b) Disconnect the connectors.
- (c) Pull out the LH headlamp assy forward.
- (d) Remove the LH headlamp assy.

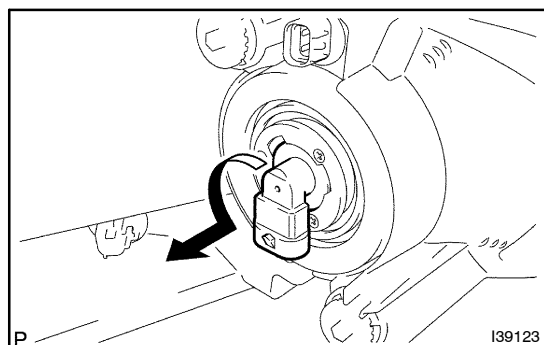


3. REMOVE HEADLAMP, NO.1 BULB

- (a) Remove the headlamp, No.1 bulb as shown in the illustration.

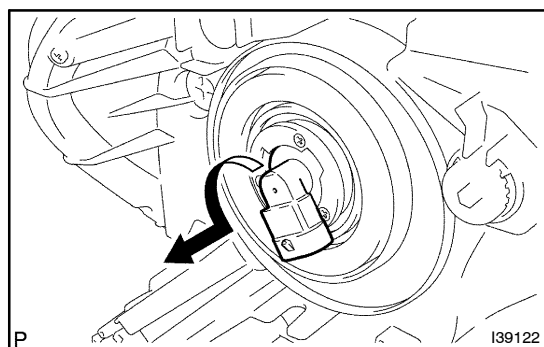

4. REMOVE HEADLAMP, NO.2 BULB


- (a) Remove the headlamp, No.2 bulb as shown in the illustration.

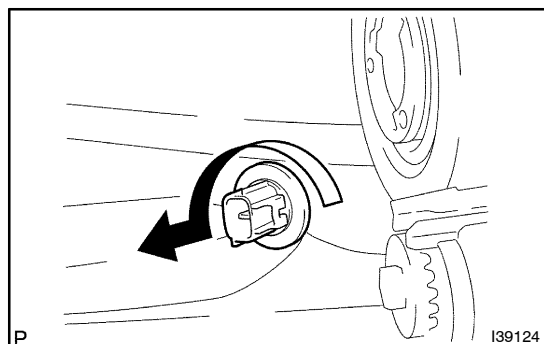

5. REMOVE FRONT TURN SIGNAL LAMP BULB

- (a) Remove the front turn signal lamp bulb and socket as shown in the illustration.

6. REMOVE FRONT TURN SIGNAL LAMP SOCKET

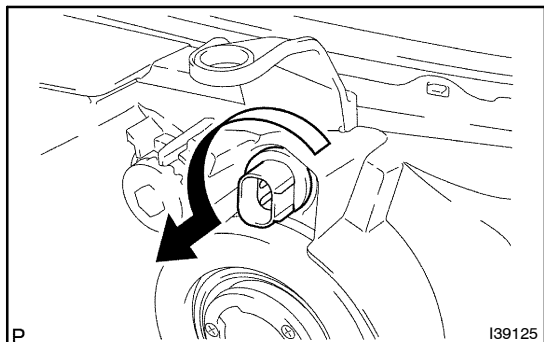

7. CLEARANCE LAMP BULB

- (a) Remove the clearance lamp bulb and socket as shown in the illustration.


8. REMOVE CLEARANCE LAMP SOCKET

9. REMOVE HEADLAMP UNIT ASSY LH

10. INSTALL HEADLAMP PROTECTOR RETAINER UPPER LH

HINT:


If the area where the headlamp unit LH is installed is broken, the repairs listed below can be performed inexpensively through the use of a repair use bracket. This may only be done if the headlamp assy LH itself is not damaged.

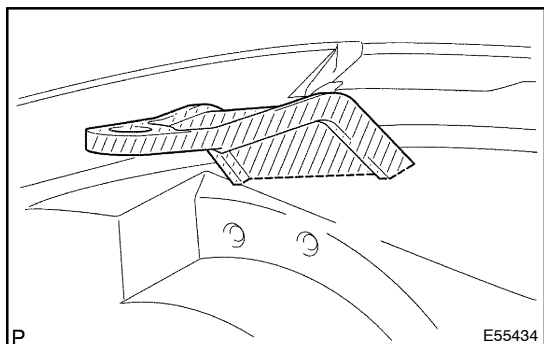

- (a) Cut off the part shaded in the illustration and sand smooth with sandpaper.

NOTICE:

After cutting off the part, place the headlamp protector retainer UPR LH against the bosses and gradually file away until installation is possible.

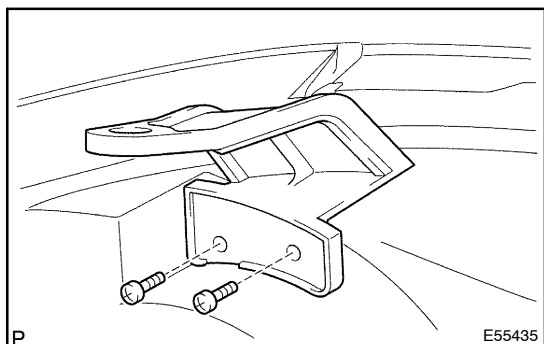


- (b) Install the headlamp protector retainer UPR LH with the 2 screws.

11. INSTALL HEADLAMP PROTECTOR RETAINER UPPER LH

HINT:

If the area where the headlamp unit LH is installed is broken, the repairs listed below can be performed inexpensively through the use of a repair use bracket. This may only be done if the headlamp assy LH itself is not damaged.

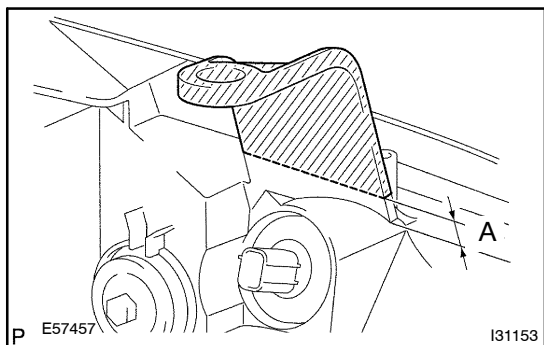


- (a) Cut off the part shaded in the illustration and sand smooth with sandpaper.

A : Less than 9 mm (0.35 in.)

NOTICE:

After cutting off the part, place the headlamp protector retainer UPR LH against the bosses and gradually file away until installation is possible.

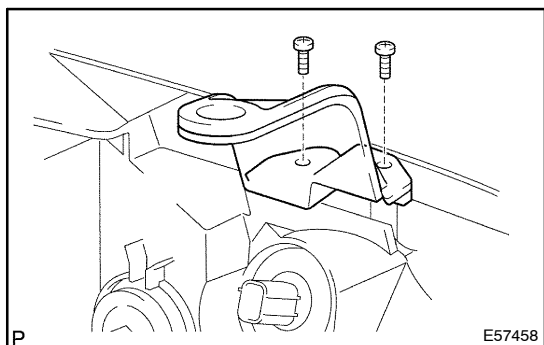


- (b) Install the headlamp protector retainer UPR LH with the 2 screws.

12. INSTALL HEADLAMP PROTECTOR RETAINER LWR LH

HINT:


If the area where the headlamp unit LH is installed is broken, the repairs listed below can be performed inexpensively through the use of a repair use bracket. This may only be done if the headlamp assy LH itself is not damaged.

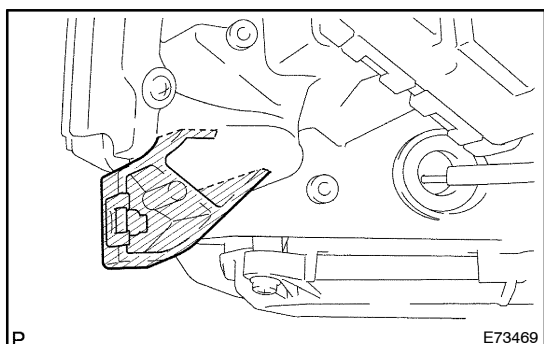

- (a) Cut off the part shaded in the illustration and sand smooth with sandpaper.

NOTICE:

After cutting off the part, place the headlamp protector retainer LWR LH against the bosses and gradually file away until installation is possible.

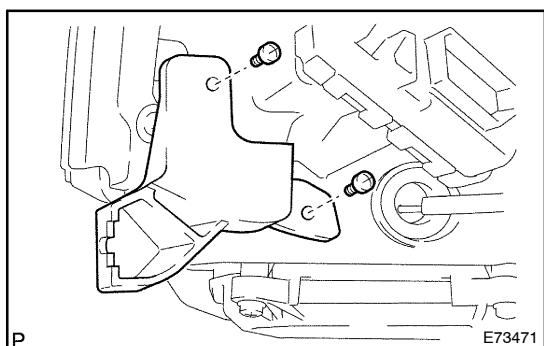


- (b) Install the headlamp protector retainer LWR LH with the 2 screws.

13. INSTALL HEADLAMP PROTECTOR RETAINER LWR LH

HINT:


If the area where the headlamp unit LH is installed is broken, the repairs listed below can be performed inexpensively through the use of a repair use bracket. This may only be done if the headlamp assy LH itself is not damaged.

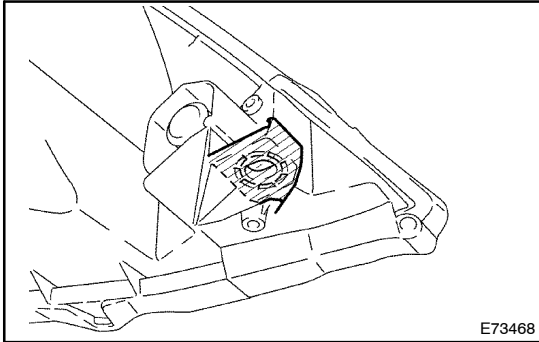

- (a) Cut off the part shaded in the illustration and sand smooth with sandpaper.

NOTICE:

After cutting off the part, place the headlamp protector retainer LWR LH against the bosses and gradually file away until installation is possible.

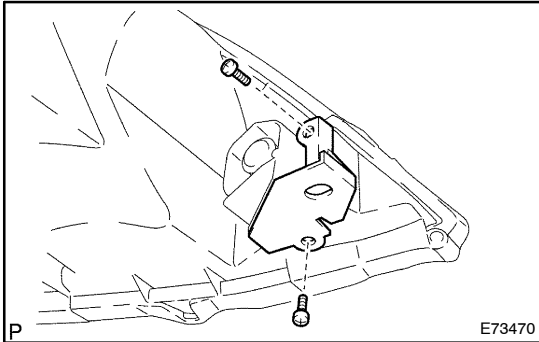

- (b) Install the headlamp protector retainer LWR LH with the 2 screws.

14. VEHICLE PREPARATION FOR HEADLAMP AIM ADJUSTMENT (SEE PAGE 65-7)
15. PREPARATION FOR HEADLAMP AIMING (Using a screen) (SEE PAGE 65-7)
16. HEADLAMP AIMING INSPECTION (SEE PAGE 65-7)
17. HEADLAMP AIMING ADJUSTMENT (SEE PAGE 65-7)
18. VEHICLE PREPARATION FOR FOG LAMP AIM ADJUSTMENT (SEE PAGE 65-12)
19. PREPARATION FOR FOG LAMP AIMING (SEE PAGE 65-12)
20. FOG LAMP AIMING INSPECTION (SEE PAGE 65-12)
21. FOG LAMP AIMING ADJUSTMENT (SEE PAGE 65-12)