

## W/HOLDER ANTENNA ASSY REPLACEMENT

6719R-01

HINT:

Installation is in the reverse order of removal.


### 1. REMOVE ROOF HEADLINING ASSY (SEE PUB. No. RM864E, PAGE 76-23)

HINT:

Refer to the procedures up to "REMOVE ROOF HEAD LINING ASSY".

### 2. REMOVE W/HOLDER ANTENNA ASSY

- (a) Disconnect each connector.
- (b) Remove the 14 clamps and 2 bolts to remove the w/ holder antenna assy.

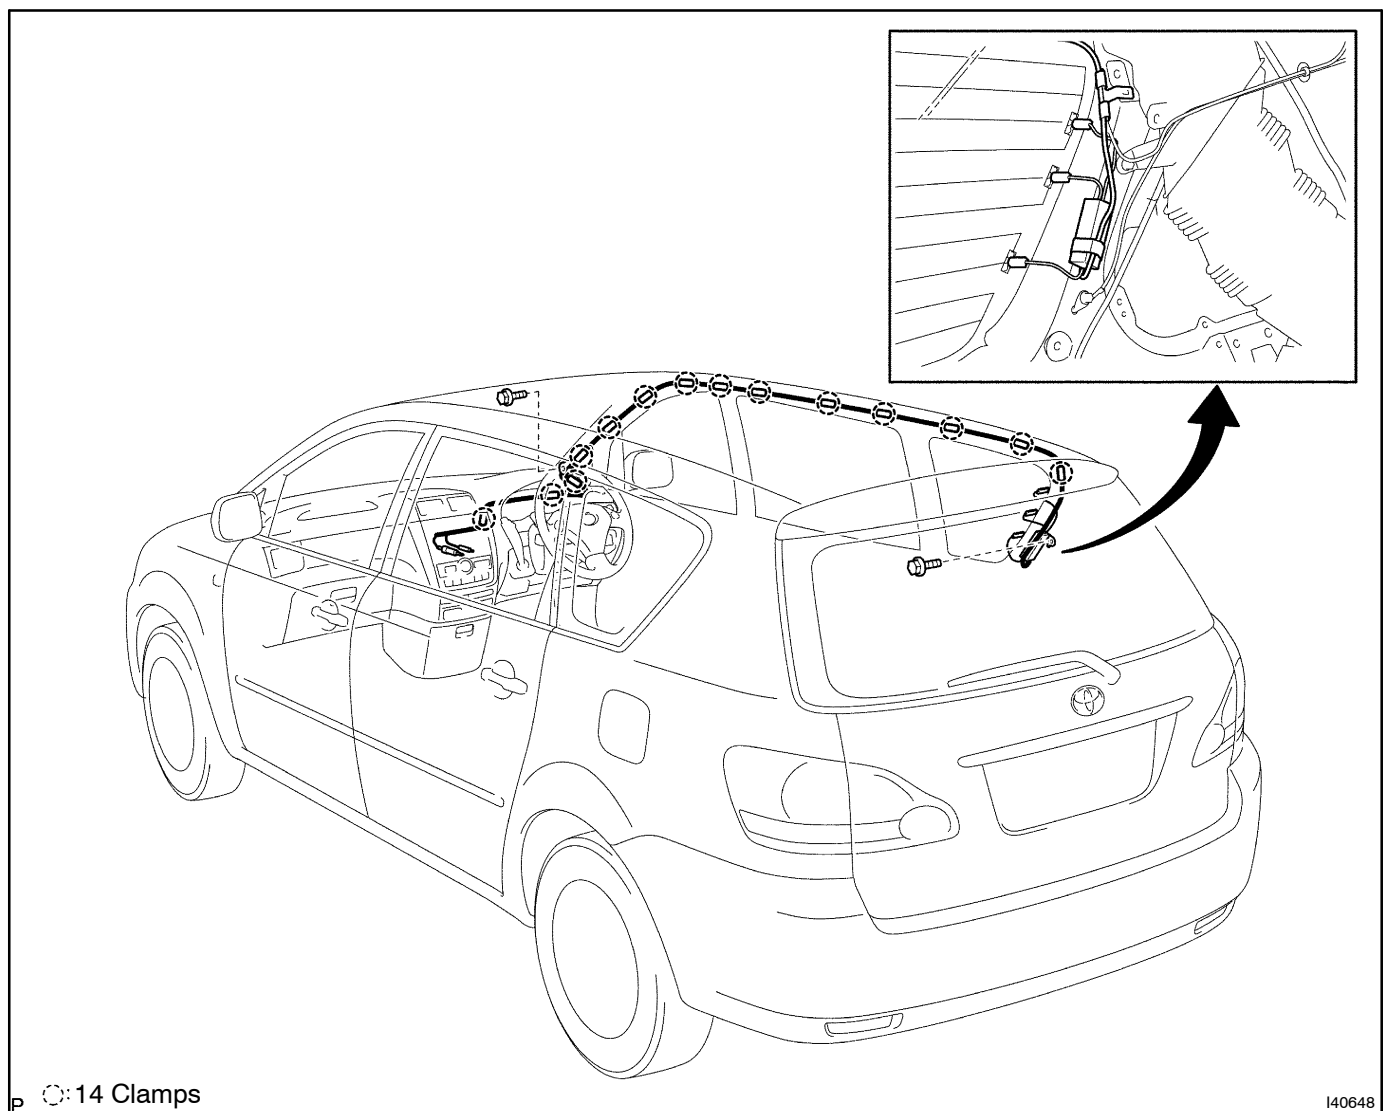

### 3. INSTALL ROOF HEADLINING ASSY (SEE PUB. No. RM864E, PAGE 76-23)

HINT:

Refer to the procedures from "REMOVE ROOF HEAD LINING ASSY".