


INTERCOOLER ASSY (1CD-FTV)

REPLACEMENT


1301Q-01

1. REMOVE BATTERY
2. REMOVE AIR CLEANER ASSY
3. REMOVE ENGINE UNDER COVER LH
4. REMOVE FRONT BUMPER ASSEMBLY (See page 76-5)

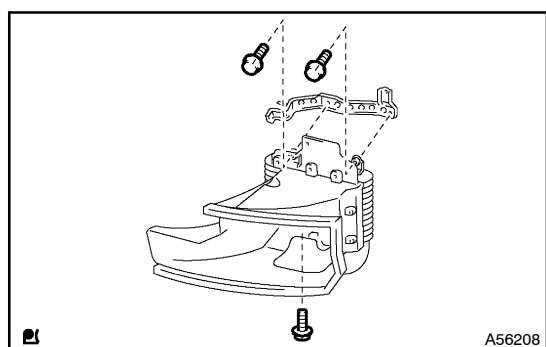

5. REMOVE INTERCOOLER ASSY

- (a) Disconnect the air tube No. 2 and air hose No. 4.
- (b) Remove the 3 bolts and the intercooler Assy w/intercooler duct.

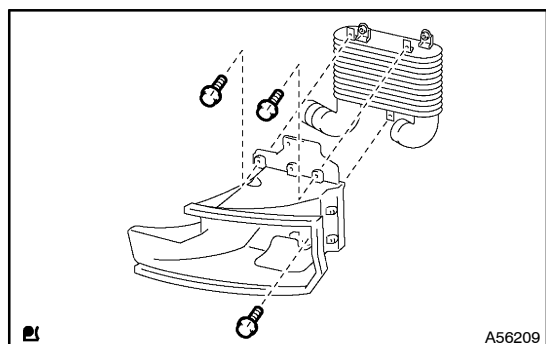

- (c) Remove the 3 bolts and the intercooler duct.

6. INSTALL INTERCOOLER ASSY

- (a) Install the 3 bolts and intercooler duct.
- (b) Install the 3 bolts and intercooler Assy w/intercooler duct.
- (c) Connect the air tube No. 2 and air hose No. 4.

7. INSTALL FRONT BUMPER ASSEMBLY (See page 76-5)