


DISPOSAL

HINT:

Dispose the RH side by the same procedures with the LH side.

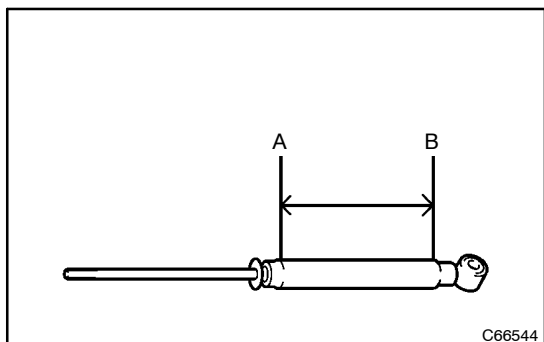

1. DISPOSE SHOCK ABSORBER ASSY REAR LH

- (a) Fully extend the shock absorber rod.
- (b) Using a drill, make a hole in the cylinder as shown in the illustration to discharge the gas inside.

CAUTION:

- When drilling, chips may fly out, work carefully.
- The gas is colorless, odorless and non-poisonous.