


## REMOVAL

### 1. DISCONNECT DEFOGGER CONNECTOR

### 2. REMOVE THESE PARTS:

- (a) Rear seat cushion and seatback
- (b) Rear seat belt
- (c) Door scuff plate
- (d) Quarter trim
- (e) Front seat belt
- (f) Roof side inner garnish
- (g) High-mounted stop light
- (h) Package tray trim side covers
- (i) Package tray trim

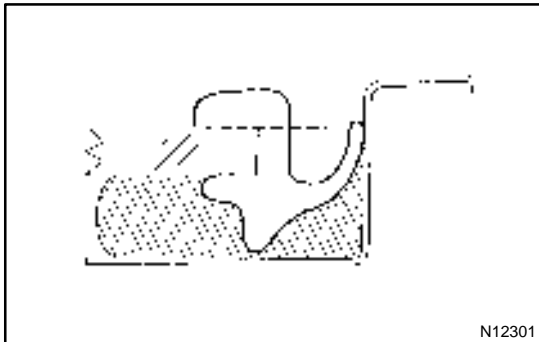


### 3. REMOVE BACK WINDOW MOULDING

Using a knife, cut off the body.

#### NOTICE:

**Do not damage the body with the knife.**

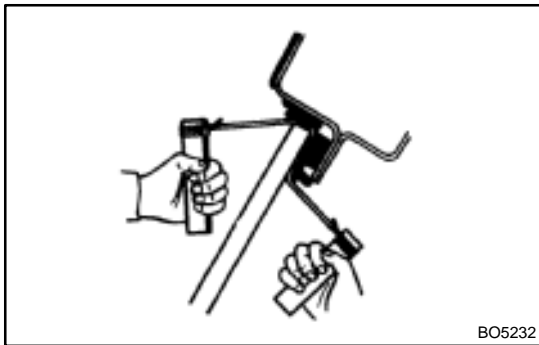

### 4. REMOVE WINDSHIELD GLASS

- (a) Disconnect the connector.
- (b) Push piano wire through between the body and glass from the interior.
- (c) Tie both wire ends to a wooden block or similar object.

#### HINT:

Apply adhesive tape to the outer surface to keep the surface from being scratched.

#### NOTICE:

**When separating, take care not to damage the paint and interior and exterior ornaments.**

- (d) Cut the adhesive by pulling the piano wire around it.
- (e) Remove the glass.

#### NOTICE:

**Leave as much of the adhesive on the body as possible when cutting off the glass.**