


TERMINALS OF ECM

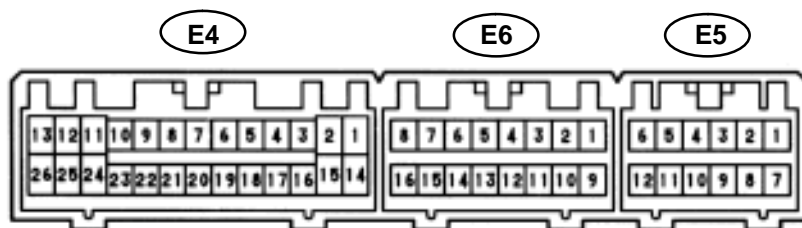

Z18952

Symbols (Terminals No.)	Wiring Color	Condition	STD Voltage (V)
S1 ↔ E1 (E4-20 ↔ E4-26)	P ↔ BR	IG OFF and disconnect ECM connector	11 – 15 Ω
		IG ON	9 – 14
		1st or 2nd gear	9 – 14
		3rd or O/D gear	Below 1.5
S2 ↔ E1 (E4-19 ↔ E4-26)	P-G ↔ BR	IG OFF and disconnect ECM connector	11 – 15 Ω
		IG ON	Below 1.5
		2nd or 3rd gear	9 – 14
		1st or O/D gear	Below 1.5
SL ↔ E1 (E4-23 ↔ E4-26)	P-B ↔ BR	IG OFF and disconnect ECM connector	11 – 15 Ω
		IG ON	Below 1.5
		Vehicle driving under lock-up position	9 – 14
SP2 ↔ E1 (E4-16 ↔ E4-26)	LG-B ↔ BR	Turn one front wheel slowly	Pulse signal is output Below 1.5 ↔ 4 – 6
OD1 ↔ E1 (E5-3 ↔ E4-26)	Y-R ↔ BR	IG ON	9 – 14
OD2 ↔ E1 (E5-9 ↔ E4-26)	R-W ↔ BR	O/D main switch ON (O/D ON)	9 – 14
		O/D main switch OFF (O/D OFF)	Below 3
L ↔ E1 (E4-5 ↔ E4-26)	LG ↔ BR	IG ON	
		Shift lever L position	7.5 – 14
		Shift lever other than L position	Below 1.5
R ↔ E1 (E4-8 ↔ E4-26)	R-B ↔ BR	IG ON and shift lever R position	7.5 – 14
		IG ON and shift lever other than R position	Below 1.5
2 ↔ E1 (E4-6 ↔ E4-26)	LG-R ↔ BR	IG ON and shift lever 2 position	7.5 – 14
		IG ON and shift lever other than 2 position	Below 1.5
NSW ↔ E1 (E4-22 ↔ E4-14)	B-W ↔ BR	IG ON and shift lever P or N position	Below 3
		IG ON and shift lever other than P or N position	9 – 14