


REMOVAL

1. REMOVE ENDS OF MOULDING

- (a) Apply protective tape to the outer surface as shown in illustration, to keep the surface from being scratched.
- (b) Using a heat light, heat the moulding to 20 to 30 °C (68 to 86 °F).

NOTICE:


Do not heat the moulding excessively.

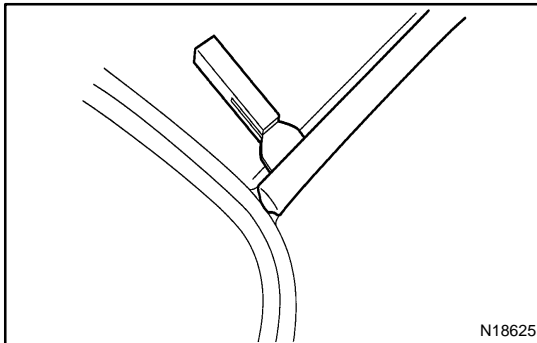

- (c) Using a scraper, pull off the roof drip side finish moulding from front end and rear end.

HINT:

Tape the scraper tip before use.

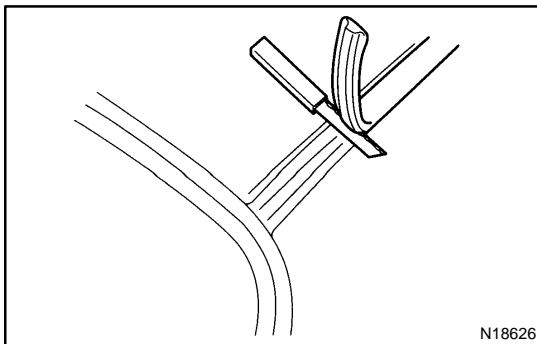

2. REMOVE MOULDING AND ADHESIVE

- (a) Pull off the moulding by cutting the adhesive with a knife.
- (b) Remove the moulding

NOTICE:

Do not damage the body with the knife.