

## DRIVE BELT INSPECTION

SR1KF-01


### INSPECT DRIVE BELT

- (a) Visually check the belt for excessive wear, frayed cords, etc.

If any defect is found, replace the drive belt.

#### HINT:

Cracks on the rib side of a belt are considered acceptable. Replace the belt if there are any missing ribs.

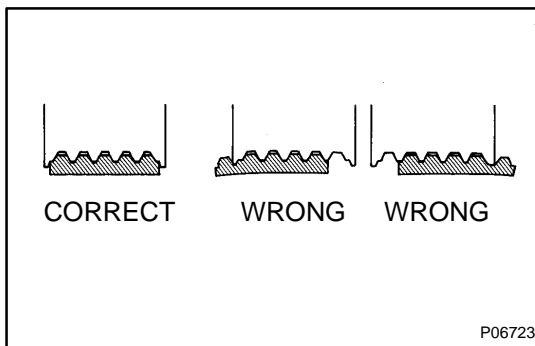

#### HINT:

- After installing a belt, check that it fits properly in the ribbed grooves.
- Check with your hand to confirm that the belt has not slipped out of the groove on the bottom of the pulley.