





Idle Speed Setting

Inspection/Adjustment

1. Start the engine and warm it up to normal operating temperature (the cooling fan comes on).
2. Connect a tachometer.

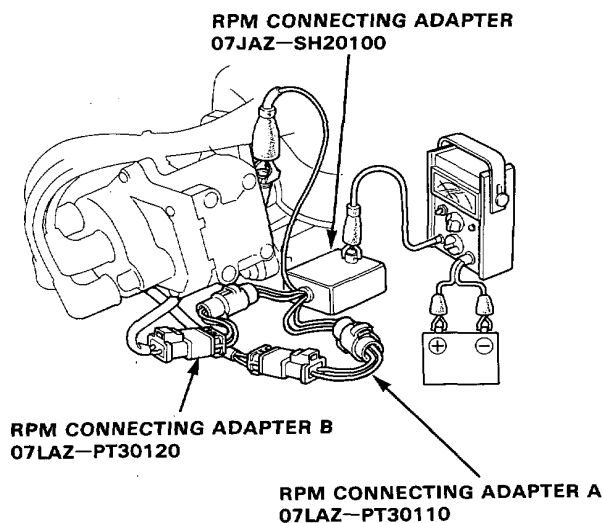

3. Disconnect the 2P connector from the EACV.

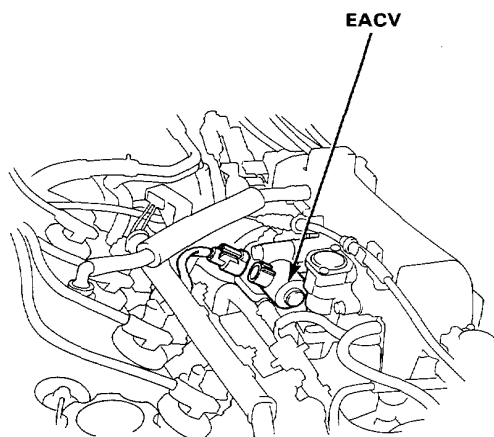

4. Check idling in no-load conditions in which the headlights, blower fan, rear defogger, cooling fan, and air conditioner are not operating.

Idle speed should be:


(Except KS, KW)

Manual	$600 \pm 50 \text{ min}^{-1} \text{ (rpm)}$
Automatic	$600 \pm 50 \text{ min}^{-1} \text{ (rpm)}$ (in N or P)

(KS, KW)

Manual	$550 \pm 50 \text{ min}^{-1} \text{ (rpm)}$
Automatic	$550 \pm 50 \text{ min}^{-1}$ (in N or P)

Adjust the idle speed, if necessary, by turning the idle adjusting screw.

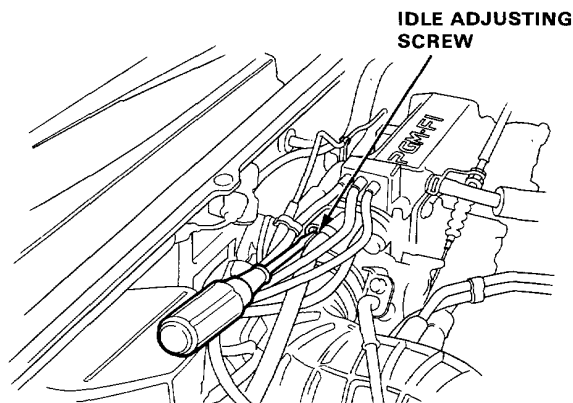

5. Turn the ignition switch OFF.
6. reconnect the 2P connector on the EACV, then remove BACK UP fuse in the underhood relay box for 10 seconds to reset ECU.
7. Restart an idle the engine with no-load conditions in which the headlights, blower fan, rear defogger, cooling fan, and air conditioner are not operating for one minute, then check the idle speed.

Idle speed should be:

Manual	$700 \pm 50 \text{ min}^{-1} \text{ (rpm)}$
Automatic	$700 \pm 50 \text{ min}^{-1} \text{ (rpm)}$

8. Idle the engine for one minute with headlights (Hi) and rear defogger ON and check the idle speed.

Idle speed should be:

Manual	$770 \pm 50 \text{ min}^{-1} \text{ (rpm)}$
Automatic	$770 \pm 50 \text{ min}^{-1} \text{ (rpm)}$

9. Idle the engine for one minute with heater fan switch at HI and air conditioner on, then check the idle speed.

Idle speed should be:

Manual	$770 \pm 50 \text{ min}^{-1} \text{ (rpm)}$
Automatic	$770 \pm 50 \text{ min}^{-1} \text{ (rpm)}$

NOTE: If the idle speed is not within specifications, see System Troubleshooting Guide on page 6-192.